

MIRO

Features

Thermostatic Shower System Trim

- Solid brass construction
- Temperature-adjust handle for thermostatic valve
- Cross handle assembly for control valve
- Intended for use with Newport Brass rough valve(s) as specified (Required Accessory)
- ADA Compliant

3-1604TS

Also 3-279

Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1-18
- IAMPO/cUPC
- IPC
- ADA & ICC/ANSI A117.1
- All applicable US Federal and State material regulations

Colors / Finishes

- 10B: Oil Rubbed Bronze
- 15: Polished Nickel
- 15S: Satin Nickel PVD
- 26: Polished Chrome







3-1604TS

3 - 279

Specified Model						
Model	Description	Colors Finishes				
3-1604TS	Thermostatic Shower System Trim	☐ 10B ☐ 15 ☐ 15S ☐ 26 ☐ Other				
3-279	Shower System Control Valve Trim (Escutcheon/Handle)	☐ 10B ☐ 15 ☐ 15S ☐ 26 ☐ Other				

Required Accessory						
System Element	Shower Temp. Control	Flow Control Valve Option A		Flow Control Valve Option B***		
Description	Thermostatic	3-Outlet Diverter w/OFF		Single Outlet ON/OFF		
Inlet/Outlet Size	3/4"	1/2" (no share function)	1/2" (w/share function)	1/2″	3/4"	
Part Number	1-540	1-701*	1-702**	1-606U	1-607U	
Image						

Flow Control Option A: Select ONE (1-701 or 1-702) per system.

Flow Control Option B: Select ONE (1-606U or 1-607U) per each outlet fixture (ie showerhead, handshower, overhead soaker).

Product Specification Add "Color / Finish" suffix to Model number, below.


The Thermostatic Shower System Trim shall be made of solid brass construction. Thermostatic Shower System Trim shall include a faceplate and temperature-adjust handle. Shower System Control Valve Trim(s) (Escutcheon/Handle) shall be ADA compliant when used with specified Shower System Control Valve(s). Thermostatic Shower System Trim shall be Newport Brass Model 3-1604TS/____ and Thermostatic Shower System Valve shall be Newport Brass Model 1-540. Shower System Control Valve Trim (Handle/Escutcheon) shall be 3-279/____ and Shower System Control Valve(s) shall be 1-70____ (1 required) or 1-60____ (one required per outlet fixture).


^{* 1-701} is a diverter valve with NO share function capability between outlets.

^{** 1-702} is a diverter valve with share function capability between primary outlet and each of the other two outlets.

3-1604TS

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

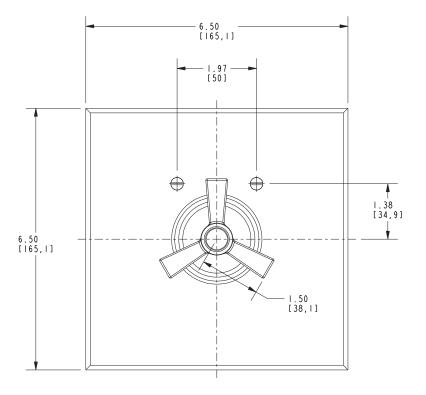

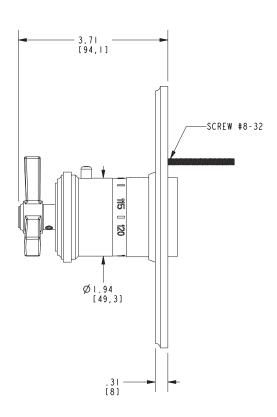

NOTE: Product Dimensions for the Shower System Control Valve Handle Trim (Handle/Escutcheon can be found within the Spec Sheet for that specific part number.

Miro Thermostatic Shower System Trim **3-1604TS**

