# NEWPORT BRASS.

# **KIRSI**

3-3125

#### Features

- Solid brass construction
- 9.15" (23.2 cm) spout length
- 1/2" NPT spout inlet fitting
- Rough valve incorporates a brass valve body assembly
- Rough valve incorporates quarter-turn washerless ceramic disc valve cartridges
- Intended for use with Newport Brass rough valve as specified (Required Accessory)
- ADA Compliant

### Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1-18
- IAMPO/cUPC
- IPC
- ADA & ICC/ANSI A117.1
- All applicable US Federal and State material regulations

#### **Colors / Finishes**

- 10B: Oil Rubbed Bronze
- Polished Nickel • 15:
- 15S: Satin Nickel PVD Polished Chrome • 26:
- Other: Refer to the Newport Brass catalog for additional color/finish options.

### **Specified Model**

Model	Description	Colors   Finishes
3-3125	Wall-Mounted Tub Trim	□ 10B □ 15 □ 15S □ 26 □ Other

### **Required Accessory**

Application	Wall Tub Rough Valve
Description	2-Cartridge Assembly
Inlet/Outlet Size	1/2″
Part Number	1-500U
Image	

#### Product Specification Add "Color / Finish" suffix to Model number, below.

The Wall-Mounted Tub Trim shall be made of solid brass construction. Wall-Mounted Tub Trim shall include lever handles and a 9.15" (23.2 cm) tub spout that incorporates a 1/2" NPT inlet fitting. Wall-Mounted Tub Trim shall be Newport Brass Model 3-3125/\_\_\_\_ and Newport Brass rough valve shall be 1-500U.



**Wall-Mounted Tub Trim** 








# 3-3125

Product dimensions are provided for reference only. For specific product installation guidelines, please reference the installation instructions of the product being installed.

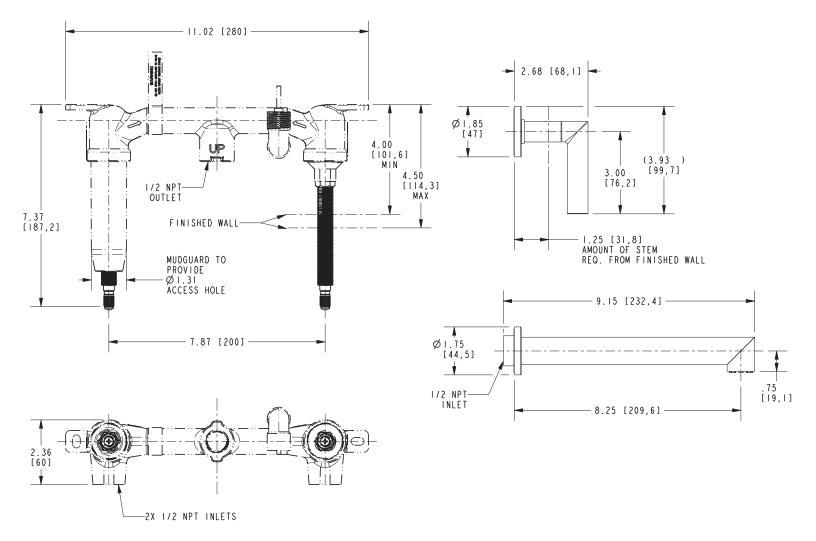

## Kirsi Wall-Mounted Tub Trim **3-3125**



Page 2 of 2 Spec\_3-3125\_a\_10.20 EN-3961-2 t: 949.417.5207 | www.newportbrass.com ©2020 Brasstech, Inc.