

## CLEMENS

### WIDESPREAD FAUCET

# 3250C

## Features


Solid brass construction  
Brass valve bodies  
Quarter-turn washerless ceramic disc valve cartridges  
Spout assembly with integral supply hoses  
Push Pop-Up drain with tailpiece  
5.31" (13.5 cm) spout height at outlet  
5.67" (14.4 cm) spout reach (c-c)  
For 8" (20.3 cm) centers -Maximum 20" (50.8 cm)  
ADA Compliant  
1.2 GPM (4.5 LPM) Max



## Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.1/CSA B125.1  
IAPMO/cUPC  
NSF/ANSI/CAN 61, SECTION 9  
NSF/ANSI 372  
IPC  
ADA & ICC/ANSI A117.1  
Energy Policy Act of 1992  
EPA WaterSense  
California Energy Commission  
All applicable US Federal and State material regulations

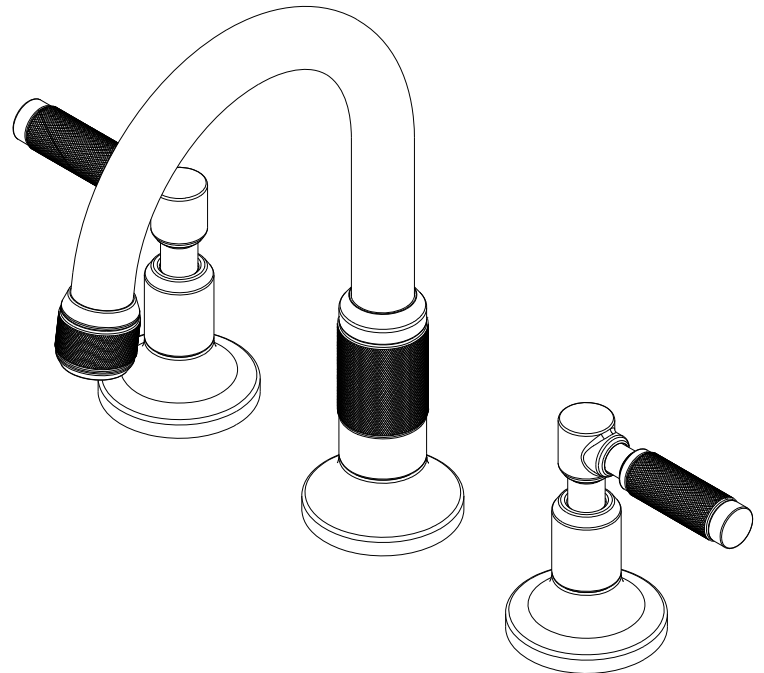

# 3250C

## PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

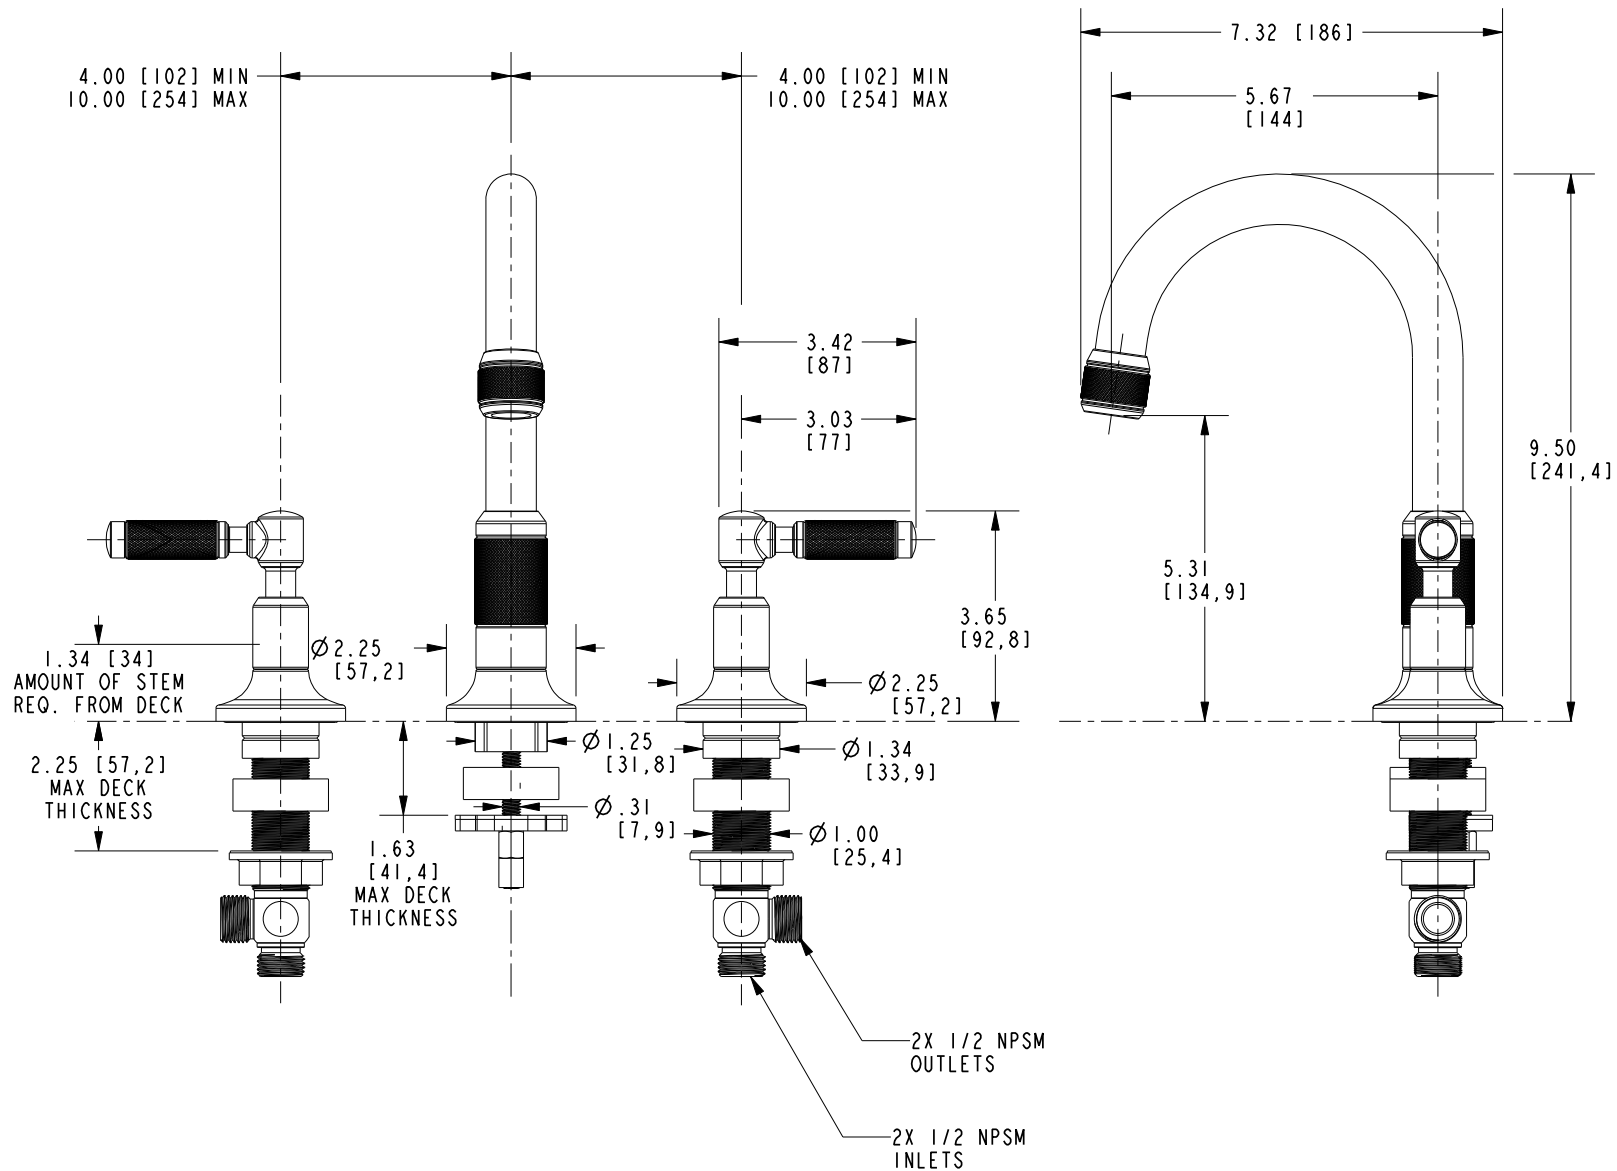

WIDESPREAD FAUCET

3250C

Page 2 of 2  
EN- 4793  
REV B

**NEWPORT BRASS**  
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | [www.newportbrass.com](http://www.newportbrass.com)  
©2024 Brasstech, Inc.