
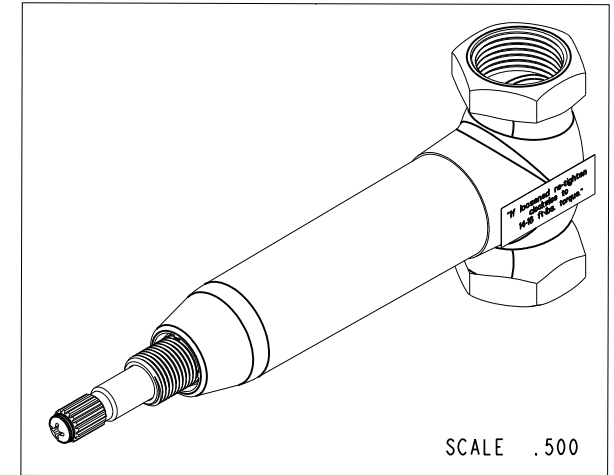


NOTES:

1. FIT / FORM / FUNCTION SHALL FOLLOW PS-E.008.
2. INSPECT VISUALLY EDGES AND SEALING SURFACES FOR BURRS, NOTCHES AND OTHER POTENTIAL SEALING DEFECTS.
3. LIGHTLY WET O-RING AND SEAL WITH GREASE PRIOR TO SEALING.
4. TORQUE TO 14-16 FT-LBS.
5. INSTALL STICKER, ITEM 2, ON THE OPPOSITE SIDE OF FLOW DIRECTION MARKING.
6. APPLY A THIN LAYER OF DOW CORNING OIL 200.
7. IF CARTRIDGE STEM LENGTH IS TOO SHORT, OPTIONAL STEM EXTENSION KIT #1-384 CAN BE PURCHASED TO EXTEND STEM LENGTH.

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	10567	BODY, 3/4" STOP VALVE	PART	1
2	98029	STICKER, 14-16 FT-LBS TORQUE	PART	1
3	1-518	CARTR. 3/4" X 4" LONG HOT	ASSEMBLY	1
4	91643	MUD COVER, VALVE 1/2"	PART	1

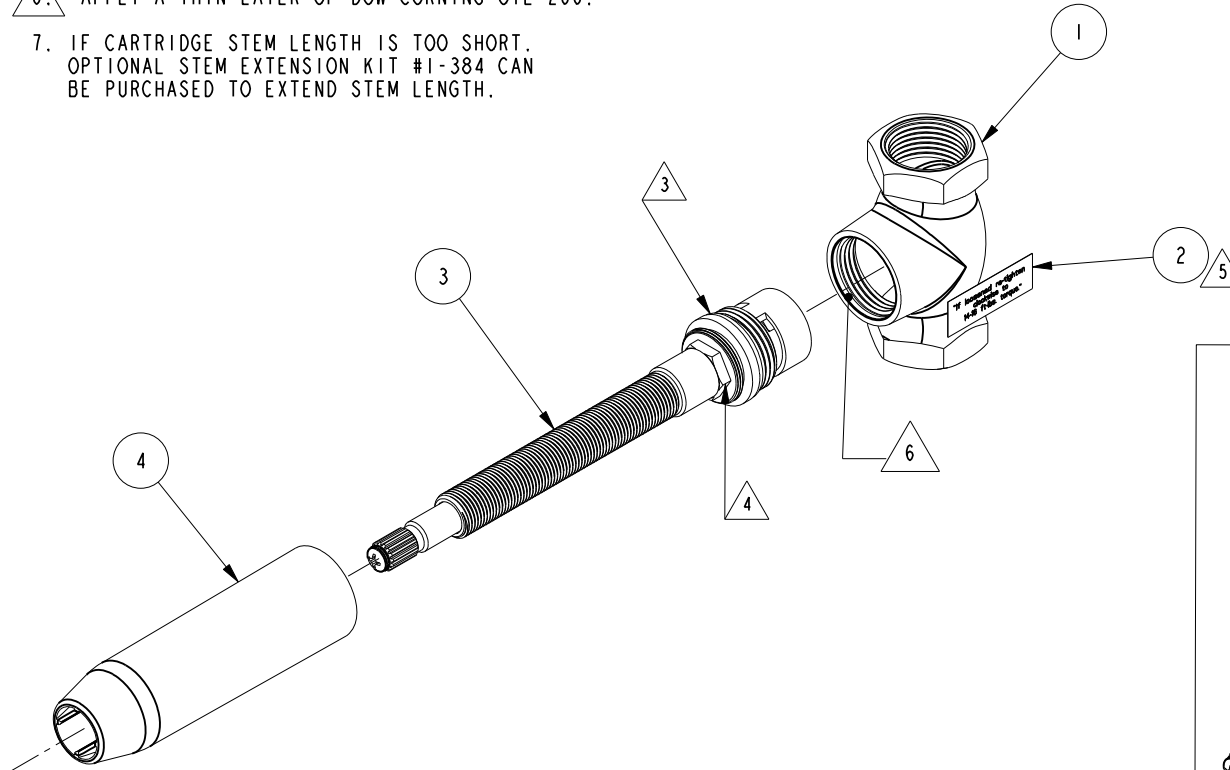


UNITS ARE: INCHES		[MM]
TOLERANCES ARE:		
FRACTIONS DECIMALS		ANGLES
±1/16"		±1°
.X ±.1 [2,5]		
.XX ±.06 [1,5]		
(X.XXX) DENOTES CRITICAL DIMS		
ALL THREADS ARE CRITICAL		
DRAWN	AMARISH	11/23/15
CHECKED	JINSON	11/23/15
APPROVED	RAVINDRA	11/23/15

UNITS ARE: INCHES [MM]
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
±1/16" .X ±.1 [2.5] ±1°
.XX ±.06 [1.5]
(X.XXX) DENOTES CRITICAL DIMS.
ALL THREADS ARE CRITICAL
DRAWN AMARISH 11/23/15
CHECKED JINSON 11/23/15
APPROVED RAVINDRA 11/23/15

BRASSTECH		2001 CARNEGIE AVE SANTA ANA, CA 92705 (949) 417-5207	
INCORPORATED			
STOP VALVE ASM - 3/4" (HOT)			
DWG NO. 1-607H			REV G
SCALE .450	REF. -	SHEET 1	OF 2

COPYRIGHT 2005 BRASSTECH, INC.
THESE DRAWINGS AND THE DESIGNS
DEPICTED HEREIN ARE THE PROPRIETARY
PROPERTY OF BRASSTECH. ANY USE
OR REPRODUCTION IS SUBJECT TO
THE EXPRESS APPROVAL OF BRASSTECH.
UNAUTHORIZED USE IS STRICTLY
PROHIBITED. ALL RIGHTS RESERVED.

ZONE	REV	DESCRIPTION	DATE	APPROVED
-	F	EN-3286	03/10/17	V.V.
-	E	EN-30950	01/24/17	V.V.
-	D	EN-2928	11/23/15	V.V.
-	C	EN-2064	02/06/12	-

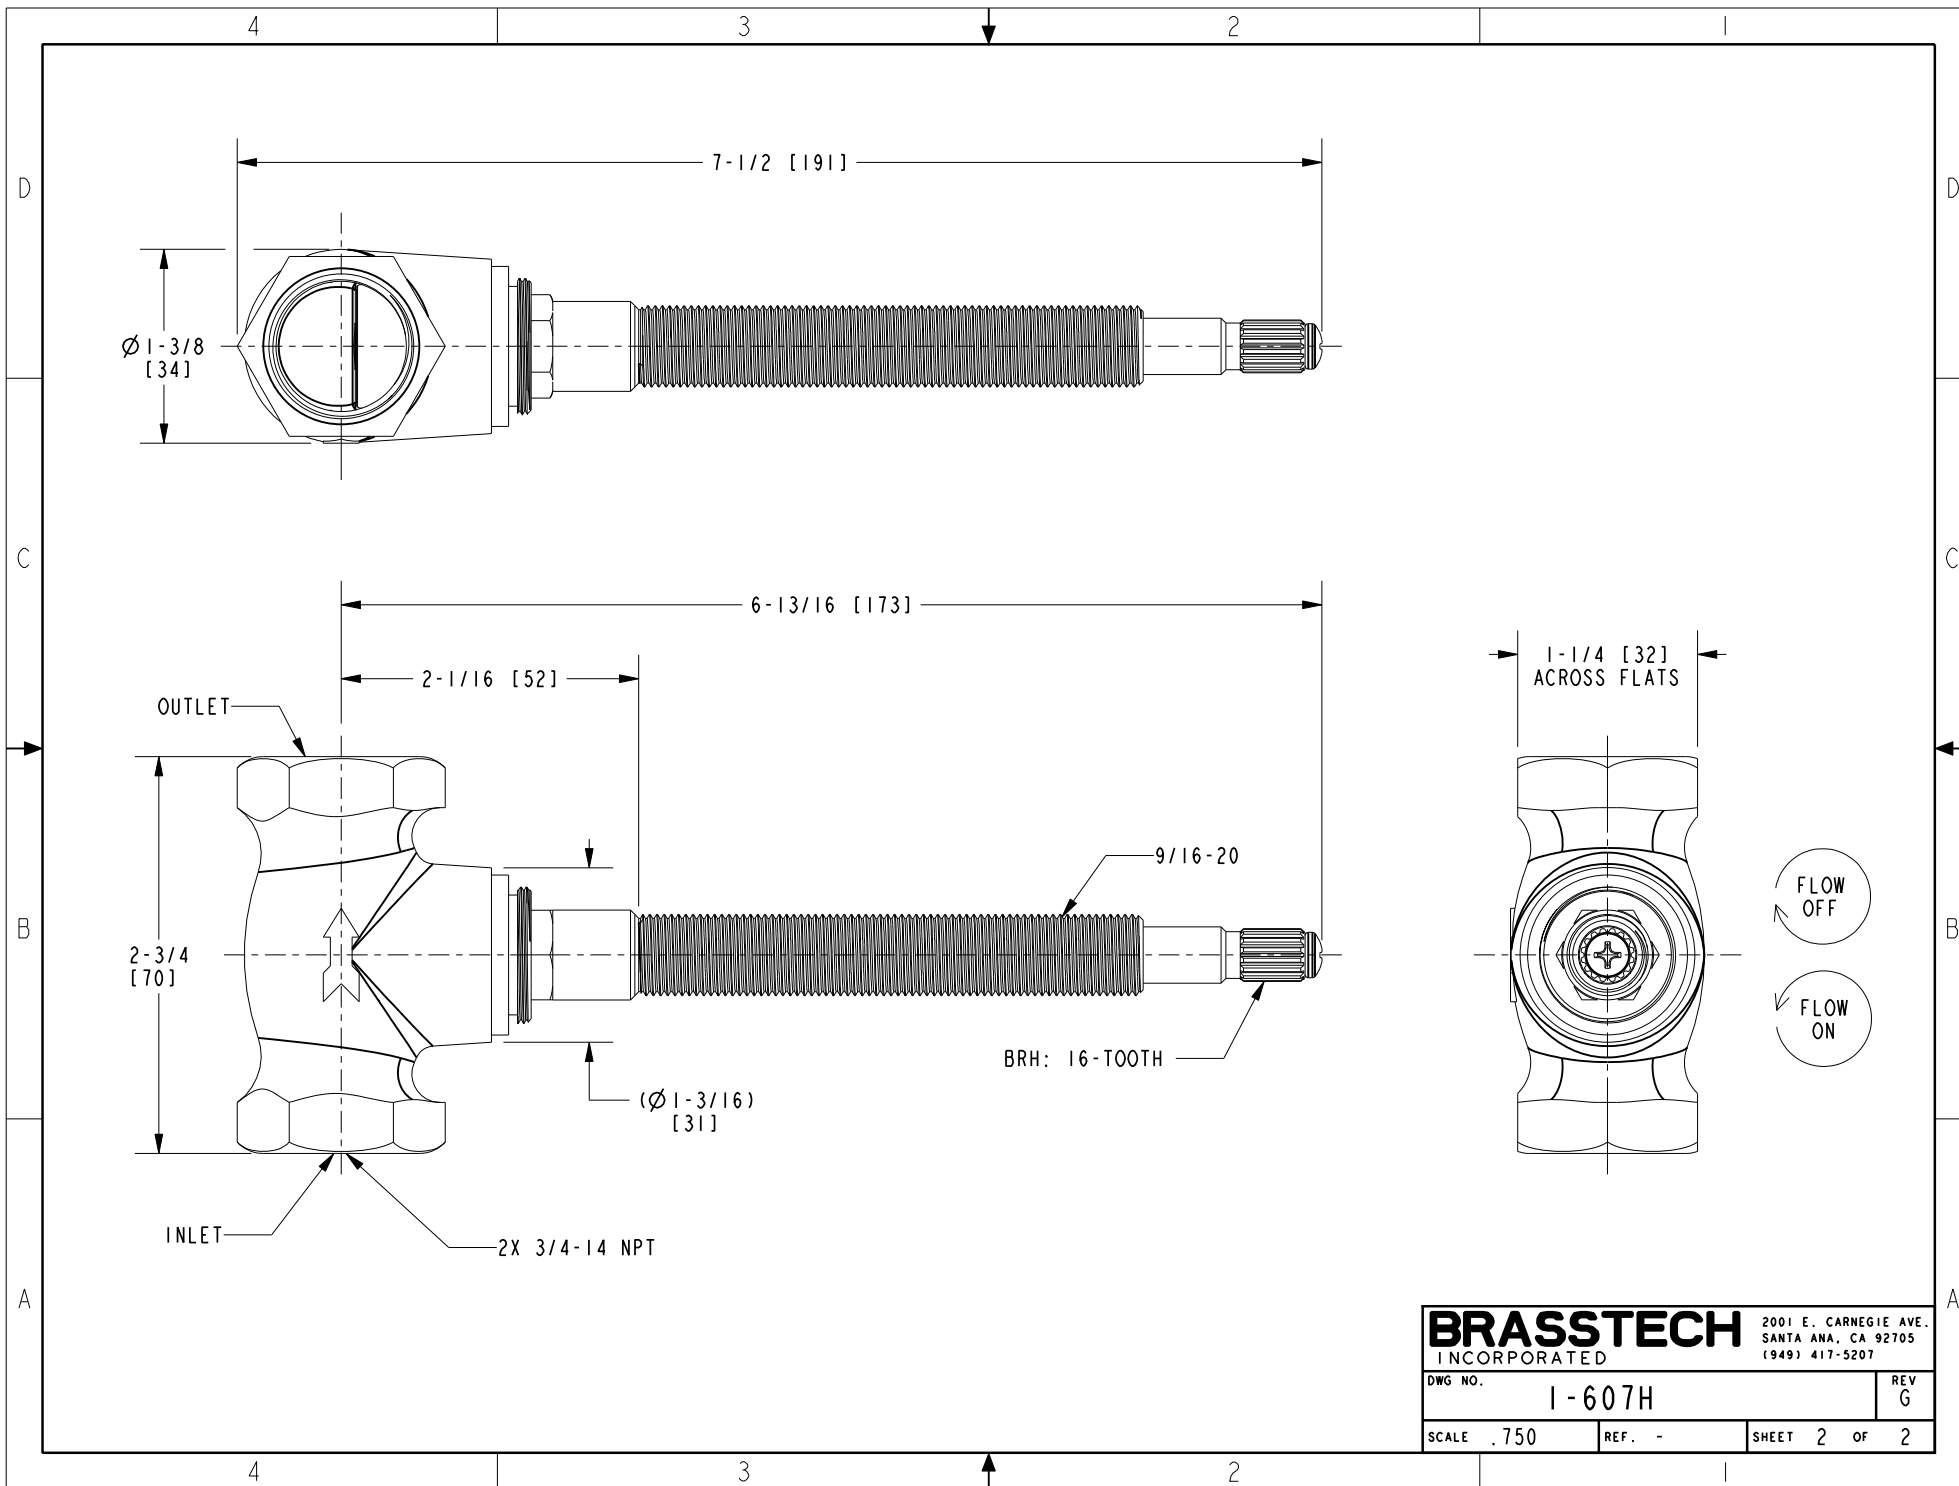

BRASSTECH INCORPORATED		2001 E. CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207
DWG NO.	1-607H	REV G
SCALE .750	REF. -	SHEET 2 OF 2