


NOTES:


1. TO INSPECT ASSEMBLY, FOLLOW FIRST ARTICLE AND IN PROCESS INSPECTION SHEET.

2. APPLY 50-60 LB-IN OF TORQUE.

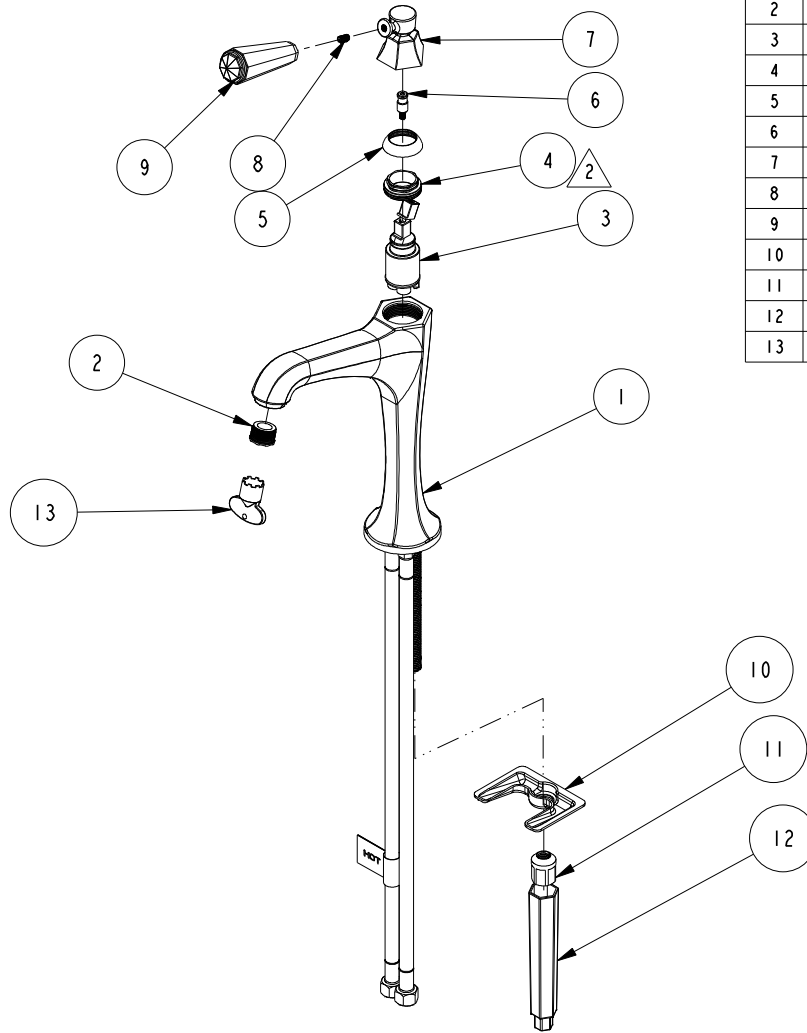

**BILL OF MATERIAL (CURRENT LEVEL)**

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	2-825	SPOUT BODY ASM - LONG	ASSEMBLY	1
2	12407	CACHE AERATOR INSERT, TINY Jr. SIZE, 1.2 GPM	PART	1
3	1-259	MIXING VALVE - FX25	ASSEMBLY	1
4	1-275	CARTRIDGE RETAINER ASSEMBLY	ASSEMBLY	1
5	12034	DECORATIVE CAP	PART	1
6	12005	STEM ADAPTOR	PART	1
7	12004	HANDLE HUB	PART	1
8	92025	SCRW, 10-24 X 3/8 SKT HD CUP PT SS	PART	1
9	2-930	CRYSTAL LEVER - HANDLE ASM	ASSEMBLY	1
10	11280	MOUNTING BRACKET	PART	1
11	11285	MOUNTING NUT	PART	1
12	92297	INSTALLATION TOOL, WRENCH	PART	1
13	91571	AERATOR KEY	PART	1

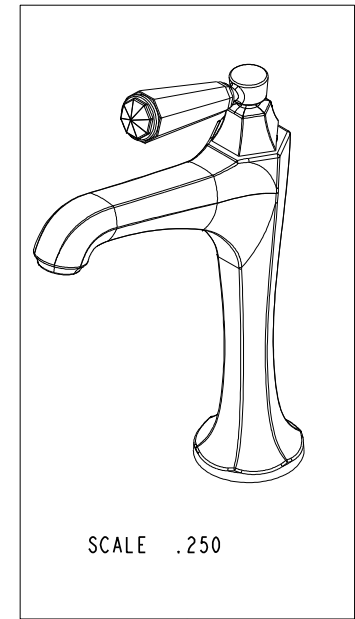

ZONE	REV	DESCRIPTION	DATE	APPROVED
-	D	EN-4300hh	04/13/21	R.S.
-	C	EN-3601	05/07/18	V.V.
-	B	EN-2896c	05/23/16	J.A
-	A	EN-2643	01/15/16	J.M
-	-	EN-2615	10/24/13	-

COPYRIGHT 2005 BRASSTECH, INC. THESE DRAWINGS AND THE DESIGNS DEPICTED HEREIN ARE THE PROPRIETARY PROPERTY OF BRASSTECH. ANY USE OR REPRODUCTION IS SUBJECT TO THE EXPRESS APPROVAL OF BRASSTECH. UNAUTHORIZED USE IS STRICTLY PROHIBITED. ALL RIGHTS RESERVED.

TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #	REMOVE ALL BURRS AND SHARP EDGES		

UNITS ARE: INCHES [MM]  
TOLERANCES ARE:  
FRACTIONS DECIMALS ANGLES  
±1/16" .X ±.1 [2.5] ±1°  
.XX ±.06 [1.5]

(X.XXX) DENOTES CRITICAL DIMS.  
ALL THREADS ARE CRITICAL


DRAWN	AMARISH	05/23/16
CHECKED	JINSON	05/23/16
APPROVED	J.A	05/23/16

**BRASSTECH** 2001 CARNEGIE AVE.  
INCORPORATED SANTA ANA, CA 92705  
(949) 417-5207

**SINGLE HOLE FAUCET WITH CRYSTAL HANDLE**

DWG NO. **1233-1** REV **D**

SCALE .175 REF. - SHEET 1 OF 2

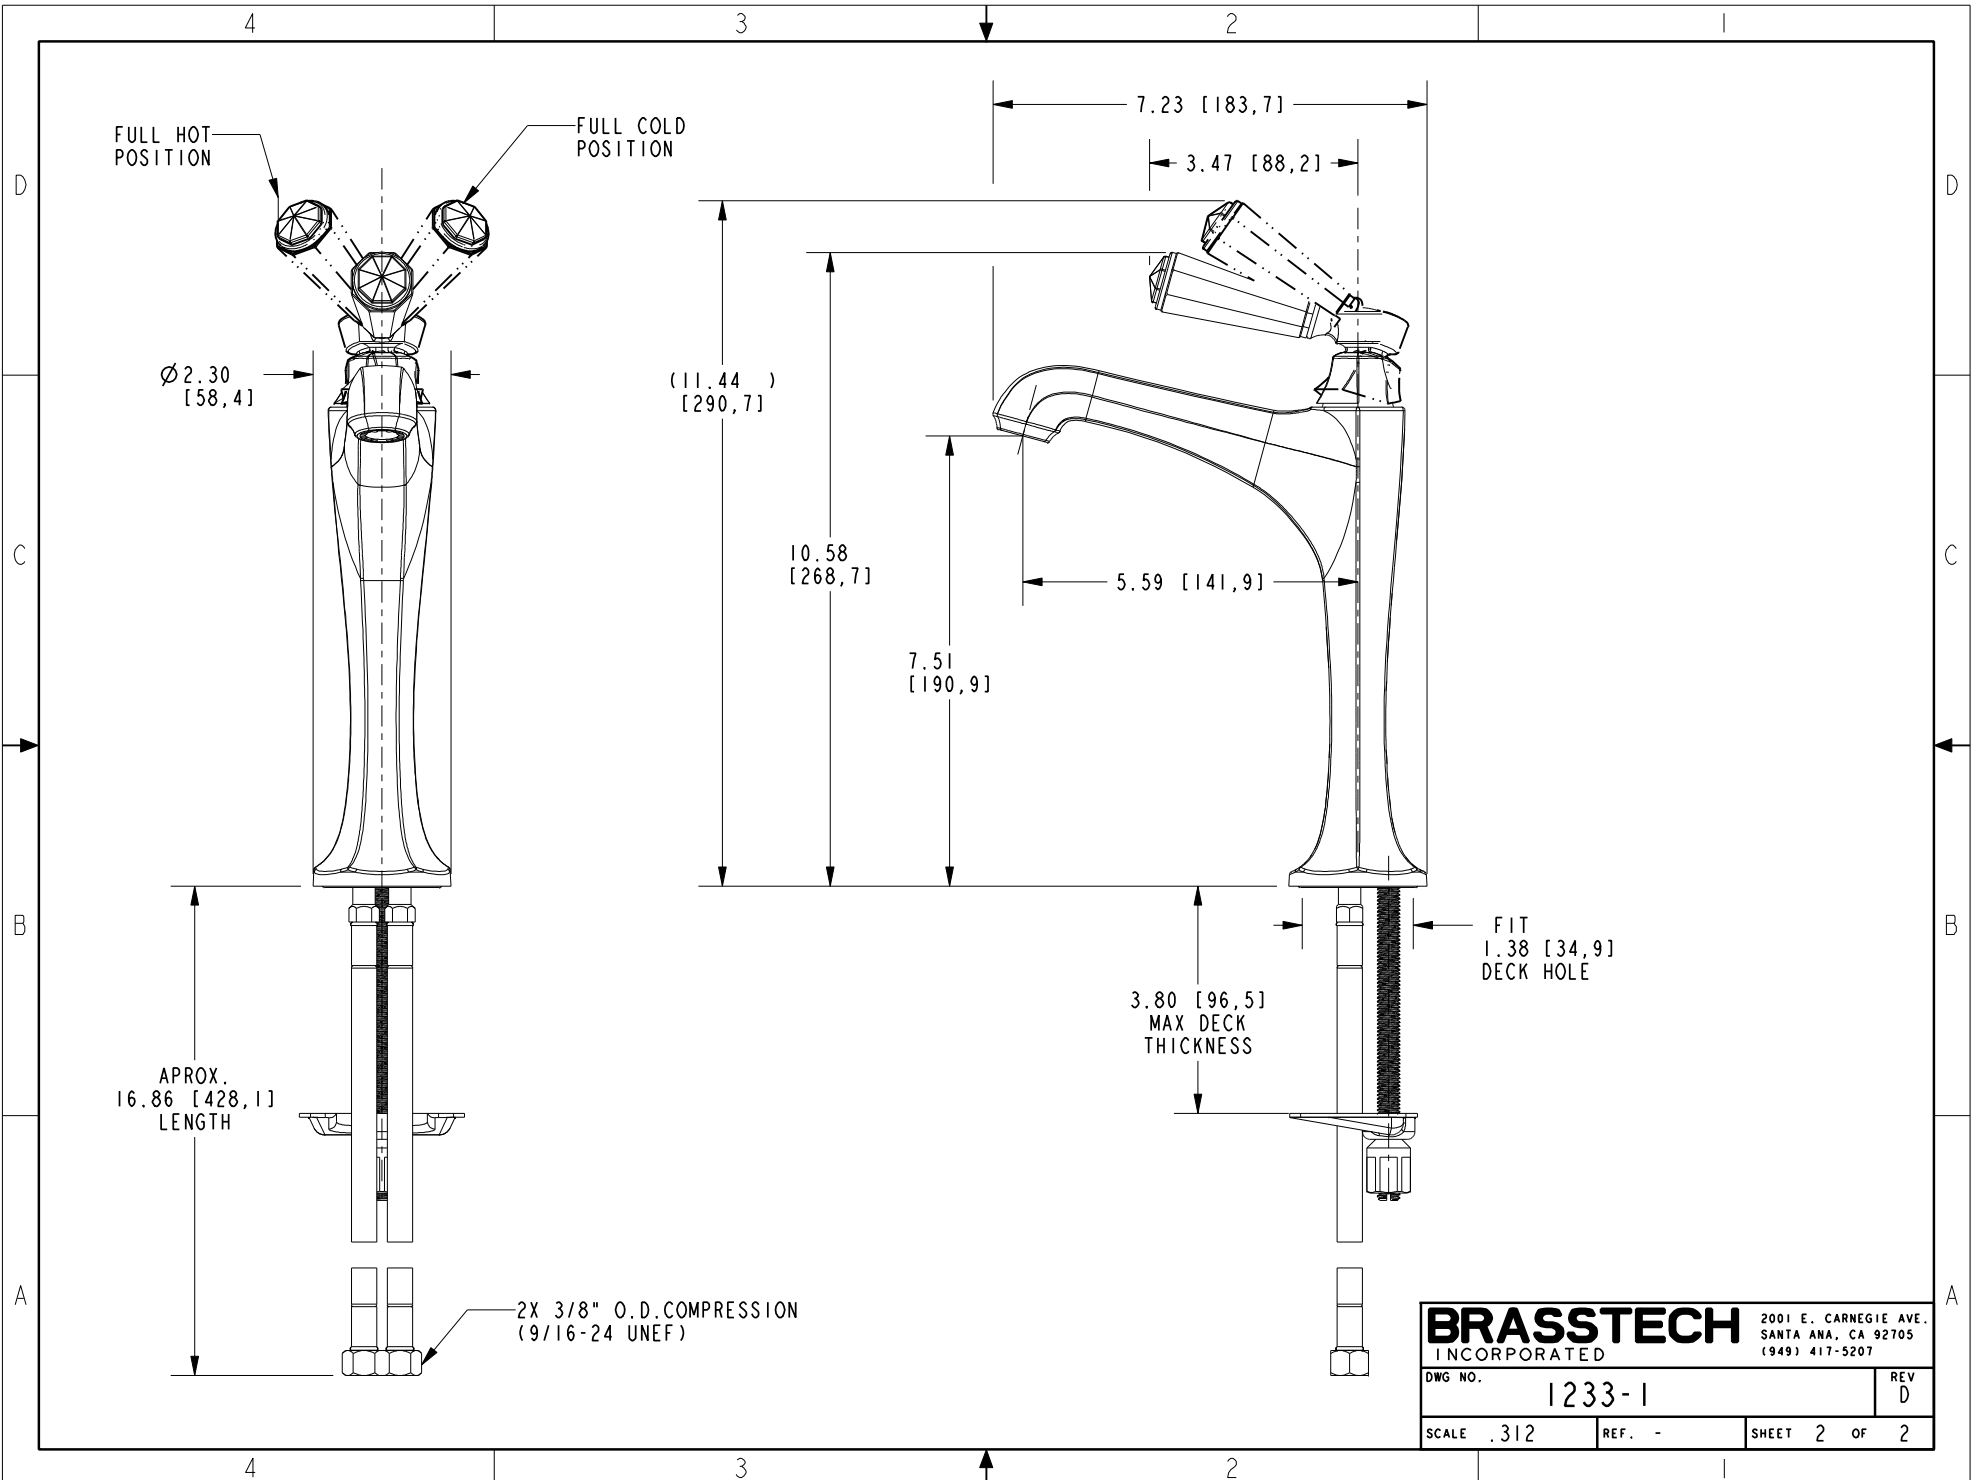

<b>BRASSTECH</b>		2001 E. CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
DWG NO.	1233-1	REV	D
SCALE	.312	REF.	-
SHEET 2		OF 2	