


NOTES:

1. TO INSPECT ASSEMBLY, FOLLOW FIRST ARTICLE AND IN PROCESS INSPECTION SHEET.
2. PUT THESE ITEMS IN SEPARATE PLASTIC BAGS.
3. TORQUE TO 8 +/-0.5 LB-FT.
4. APPLY THIN COAT OF SILICON GREASE FOR ALL O-RINGS BEFORE INSTALLATION.
5. APPLY LOCTITE 242, IF SCREW DOES NOT HAVE NYLON PATCH.
6. APPLY LOCTITE 680.
7. PULL OUT HOSE AND APPLY SILICON GREASE, BETWEEN HOSE AND SPOUT, 10" FROM OUTLET TO HOSE.
8. TORQUE SWIVEL NUT TO 19 +/-2 LB-IN.
9. TORQUE TO 10 +/-2 LB-FT.
10. TORQUE TO 7 +/-2 LB-IN.
11. PARTIALLY THREAD MOUNTING KIT ONTO SHANK.
12. DO NOT DOCK SPRAY HEAD TO SPOUT WHEN PACKAGING.

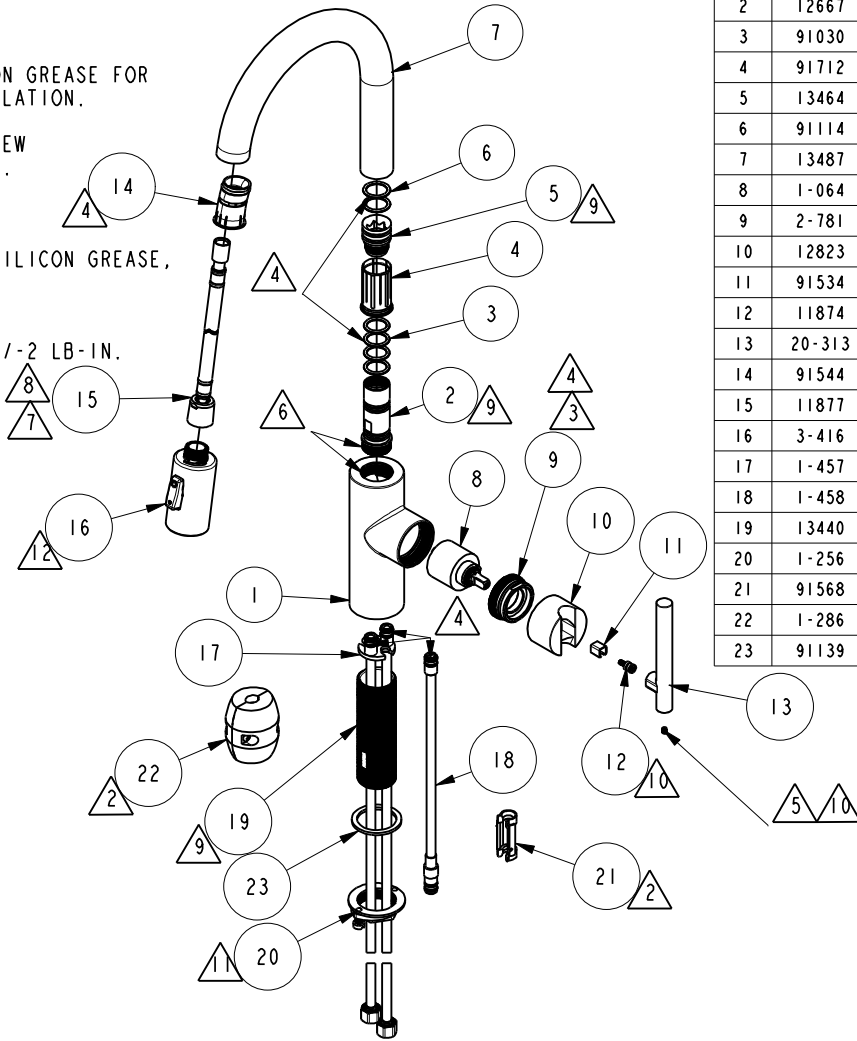

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	13486	BODY, TAFT PULL-DOWN	PART	1
2	12667	SPOUT ADAPTER	PART	1
3	91030	O-RING, #2- 115, EPDM, 65-75 DURO, NSF 61	PART	4
4	91712	SLEEVE	PART	1
5	13464	ADAPTER EXTENSION	PART	1
6	91114	O-RING, #2- 116, EPDM, 65-75 DURO, NSF 61	PART	2
7	13487	PULLDOWN SPOUT - SHORT	PART	1
8	1-064	SINGLE LEVER CARTRIDGE	PART	1
9	2-781	CART. RETAINER ASM	ASSEMBLY	1
10	12823	HANDLE HUB	PART	1
11	91534	CARTRIDGE STEM INSERT	PART	1
12	11874	HANDLE ADAPTER SCREW	PART	1
13	20-313	HANDLE LEVER ASM	ASSEMBLY	1
14	91544	MAGNET DOCKING	ASSEMBLY	1
15	11877	HOSE, PULLDOWN SWIVEL	ASSEMBLY	1
16	3-416	SPRAY HEAD, CONTEMP	ASSEMBLY	1
17	1-457	INTEGRATED SUPPLY HOSE	ASSEMBLY	1
18	1-458	OUTLET HOSE	ASSEMBLY	1
19	13440	SHANK	PART	1
20	1-256	MOUNTING KIT	ASSEMBLY	1
21	91568	RETAINER CLIP	PART	1
22	1-286	WEIGHT ASM	ASSEMBLY	1
23	91139	WASHER RBR 1-3/8	PART	1

REV	DESCRIPTION	DATE	APPROVED	C.G.
-	R	EN-4446	01/27/22	C.G.
-	P	EN-4213D	08/09/21	C.G.
-	N	EN-4300s	03/29/21	R.S.
-	M	EN-4273	10/13/20	V.V.
-	L	EN-4167	06/11/20	JMR
-	K	EN-4051	01/17/20	J.M.
-	J	EN-3931B	09/06/19	V.V.
-	H	EN-3539B	09/06/19	V.V.
-	G	EN-3413j	06/19/18	J.A.
-	F	EN-3413c	01/10/18	JM
-	E	EN-3034L	09/11/17	J.A
-	D	EN-3034F	04/20/17	J.A
-	C	EN-3034	04/13/17	J.A
-	B	EN-2500	04/22/13	-
-	A	EN-2443A	04/18/13	-
-	-	EN-3493	03/25/13	-

COPYRIGHT 2005 BRASSTECH, INC. THESE DRAWINGS AND THE DESIGNS DEPICTED HEREIN ARE THE PROPRIETARY PROPERTY OF BRASSTECH. ANY USE OR REPRODUCTION IS SUBJECT TO THE EXPRESS APPROVAL OF BRASSTECH. UNAUTHORIZED USE IS STRICTLY PROHIBITED. ALL RIGHTS RESERVED.

TESTING	ASSEMBLY	PLATING	POLISHING	MACHINING	TOOLING FIXTURE #	APPLICATION
-	-	-	-	-	-	REMOVE ALL BURRS AND SHARP EDGES
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-

UNITS ARE:	INCHES	[MM]
TOLERANCES ARE:	FRACTIONS	DECIMALS
	±1/16"	±.06
	.X ±.1	[2.5]
	.XX ±.06	[1.5]
(X.XXX)	DENOTES CRITICAL DIMS.	
ALL THREADS ARE CRITICAL		
DRAWN	JINSON	01/27/22
CHECKED	C.G.	01/27/22
APPROVED	C.G.	01/27/22

**BRASSTECH** 2001 CARNEGIE AVE  
SANTA ANA, CA 92705  
(949) 417-5207

INCORPORATED

**EAST LINEAR PULL DOWN - BAR/PERP FAUCET**

DWG NO. 1500-5203

SCALE .150 REF. SHEET 1 OF 2

REV R

