

4

3

2

1

NOTES:

1. TO INSPECT ASSEMBLY, FOLLOW FIRST ARTICLE AND IN PROCESS INSPECTION SHEET.

2. PUT THESE ITEMS IN SEPARATE PLASTIC BAGS.

3. TORQUE TO 8 +/-0.5 LB-FT.

4. APPLY THIN COAT OF SILICON GREASE FOR ALL O-RINGS BEFORE INSTALLATION.

5. APPLY LOCTITE 242, IF SCREW DOES NOT HAVE NYLON PATCH.

6. APPLY LOCTITE 680.

7. PULL OUT HOSE AND APPLY SILICON GREASE, BETWEEN HOUSE AND SPOUT, 10" FROM OUTLET TO HOSE.

8. TORQUE SWIVEL NUT TO 10 +/-2 LB-IN.


9. TORQUE TO 10 +/-2 LB-FT.

10. TORQUE TO 7 +/-2 LB-IN.

11. PARTIALLY THREAD MOUNTING KIT ONTO SHANK.

12. DO NOT DOCK SPRAY HEAD TO SPOUT WHEN PACKAGING.

13. PLACE ZIP TIE 2" FROM BOTTOM OF SHANK.

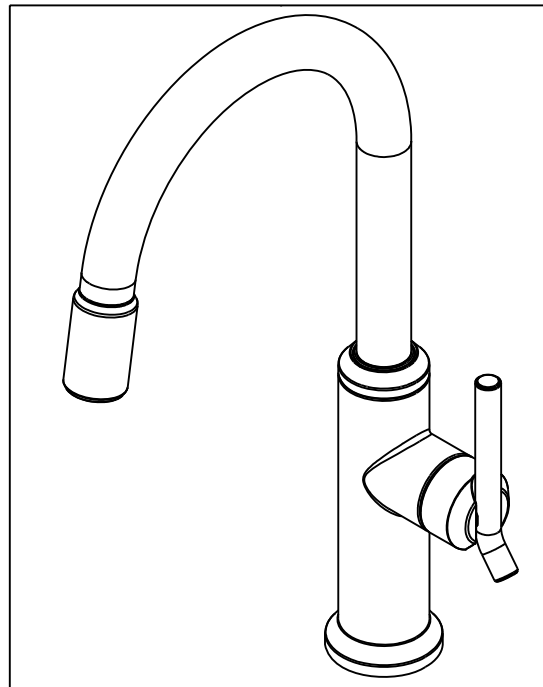

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	20-215	BASE RING ASM	ASSEMBLY	1
2	20-277	MAIN BODY ASM, CONTEMP	ASSEMBLY	1
3	13668	COLLAR	PART	1
4	13672	PULLDOWN COLLAR ADAPTER	PART	1
5	91608	O-RING, #2-122, EPDM, 65-75 DURO	PART	1
6	12667	SPOUT ADAPTER	PART	1
7	91030	O-RING, #2- 115, EPDM, 65-75 DURO, NSF 61	PART	4
8	91712	SLEEVE	PART	1
9	13385	PULLDOWN SPOUT - LONG	PART	1
10	91544	MAGNET DOCKING	ASSEMBLY	1
11	11877	HOSE, PULLDOWN SWIVEL	ASSEMBLY	1
12	3-592	SPRAY HEAD, CONTEMP	ASSEMBLY	1
13	1-064	SINGLE LEVER CARTRIDGE	PART	1
14	1-266	CART. RETAINER ASM	ASSEMBLY	1
15	11874	HANDLE ADAPTER SCREW	PART	1
16	12840	HANDLE HUB	PART	1
17	91534	CARTRIDGE STEM INSERT	PART	1
18	20-317	HANDLE LEVER ASM	ASSEMBLY	1
19	91255	O-RING, #2- 011, EPDM, 65-75 DURO, NSF-61	PART	2
20	91568	RETAINER CLIP	PART	1
21	1-256	MOUNTING KIT	ASSEMBLY	1
22	91341	ZIP TIE	PART	1
23	98044	LABEL - HOT	PART	1
24	1-286	WEIGHT ASM	ASSEMBLY	1
25	13464	ADAPTER EXTENSION	PART	1
26	91114	O-RING, #2- 116, EPDM, 65-75 DURO, NSF 61	PART	2


-	G	EN-4325b	05/12/21	J.M.
-	F	EN-4118b	12/17/20	J.M.
-	E	EN-4192A	09/25/20	J.M.
-	D	EN-4200A	09/24/20	C.G.
-	C	EN-4167	06/10/20	JMR
-	B	EN-3931b	09/24/19	J.M.
-	A	EN-3413b	11/14/17	JM
-	-	EN-3076	09/26/17	JM
ZONE	REV	DESCRIPTION	DATE	APPROVED

COPYRIGHT 2005 BRASSTECH, INC. THESE DRAWINGS AND THE DESIGNS DEPICTED HEREIN ARE THE PROPRIETARY PROPERTY OF BRASSTECH. ANY USE OR REPRODUCTION IS SUBJECT TO THE EXPRESS APPROVAL OF BRASSTECH. UNAUTHORIZED USE IS STRICTLY PROHIBITED. ALL RIGHTS RESERVED.

TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #	REMOVE ALL BURRS AND SHARP EDGES		

UNITS ARE: INCHES [MM]	
TOLERANCES ARE:	
FRACTIONS DECIMALS	ANGLES
±1/16"	.X ±.1 [2.5] ±1°
	.XX ±.06 [1.5]
(X.XXX) DENOTES CRITICAL DIMS. ALL THREADS ARE CRITICAL	
DRAWN	JINSON 03/29/21
CHECKED	R.S. 03/29/21
APPROVED	R.S. 03/29/21

BRASSTECH		2001 CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
INCORPORATED			
KITCHEN PULLDOWN			
DWG NO.		REV	
3200-5113		G	
SCALE	REF.	SHEET	OF
.250	-	1	3

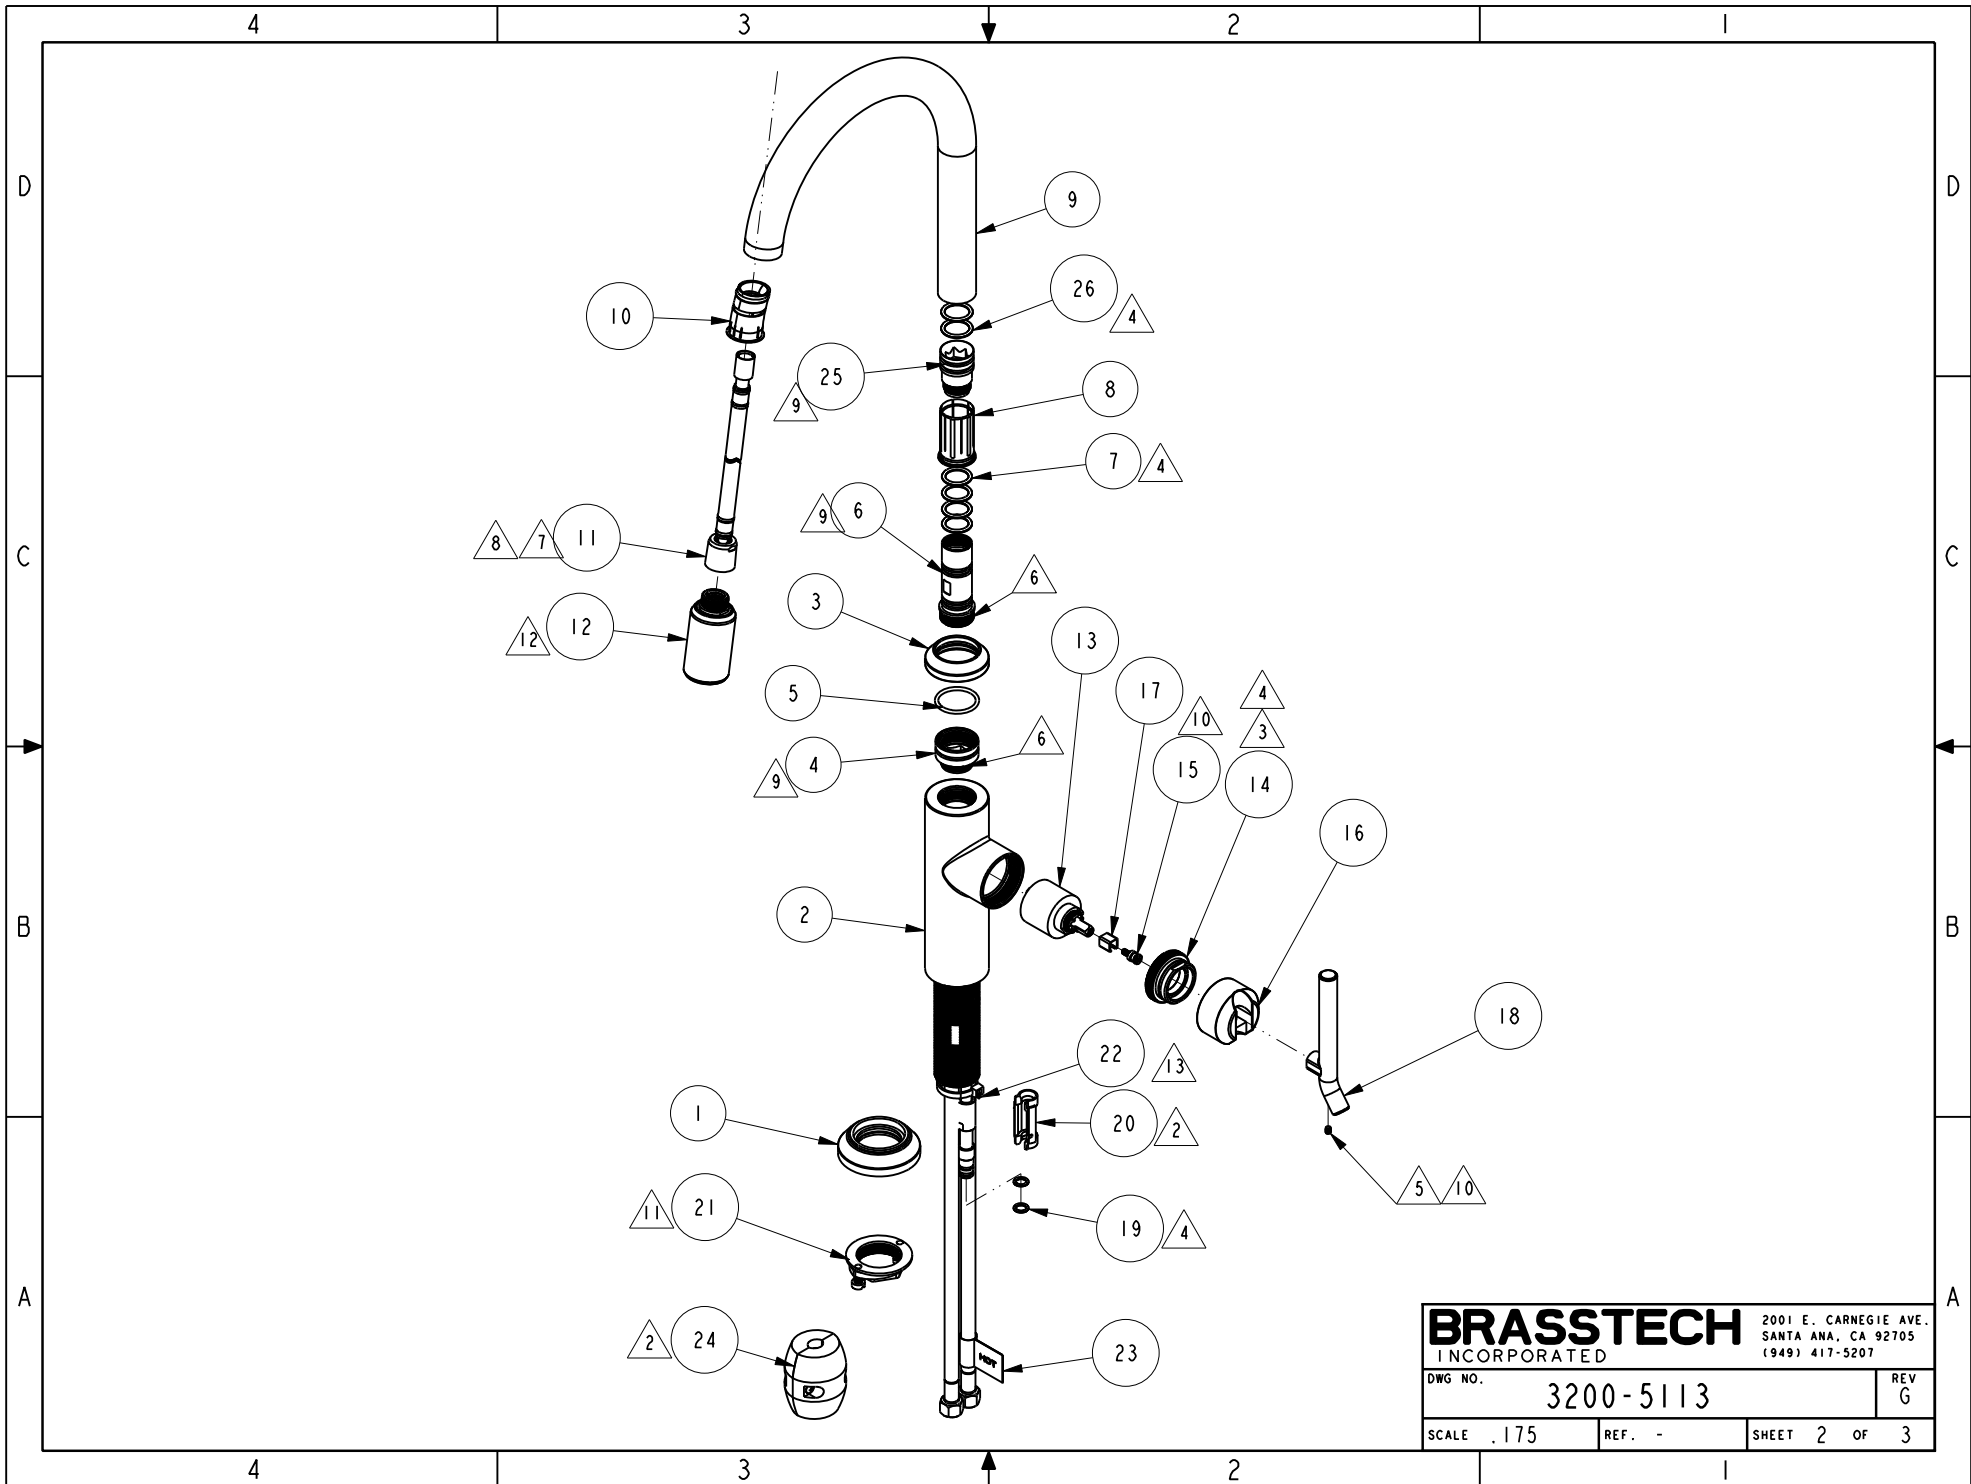

BRASSTECH		2001 E. CARNEGIE AVE.	
INCORPORATED		SANTA ANA, CA 92705	
		(949) 417-5207	
DWG NO.	3200-5113	REV	G
SCALE .175	REF. -	SHEET 2	OF 3

