


NOTES:

1. TO INSPECT ASSEMBLY, FOLLOW FIRST ARTICLE AND IN PROCESS INSPECTION SHEET.

2. APPLY SILICON GREASE TO O-RINGS.


3. APPLY LOCTITE 680.

4. TORQUE TO 15-20 IN-LBS.

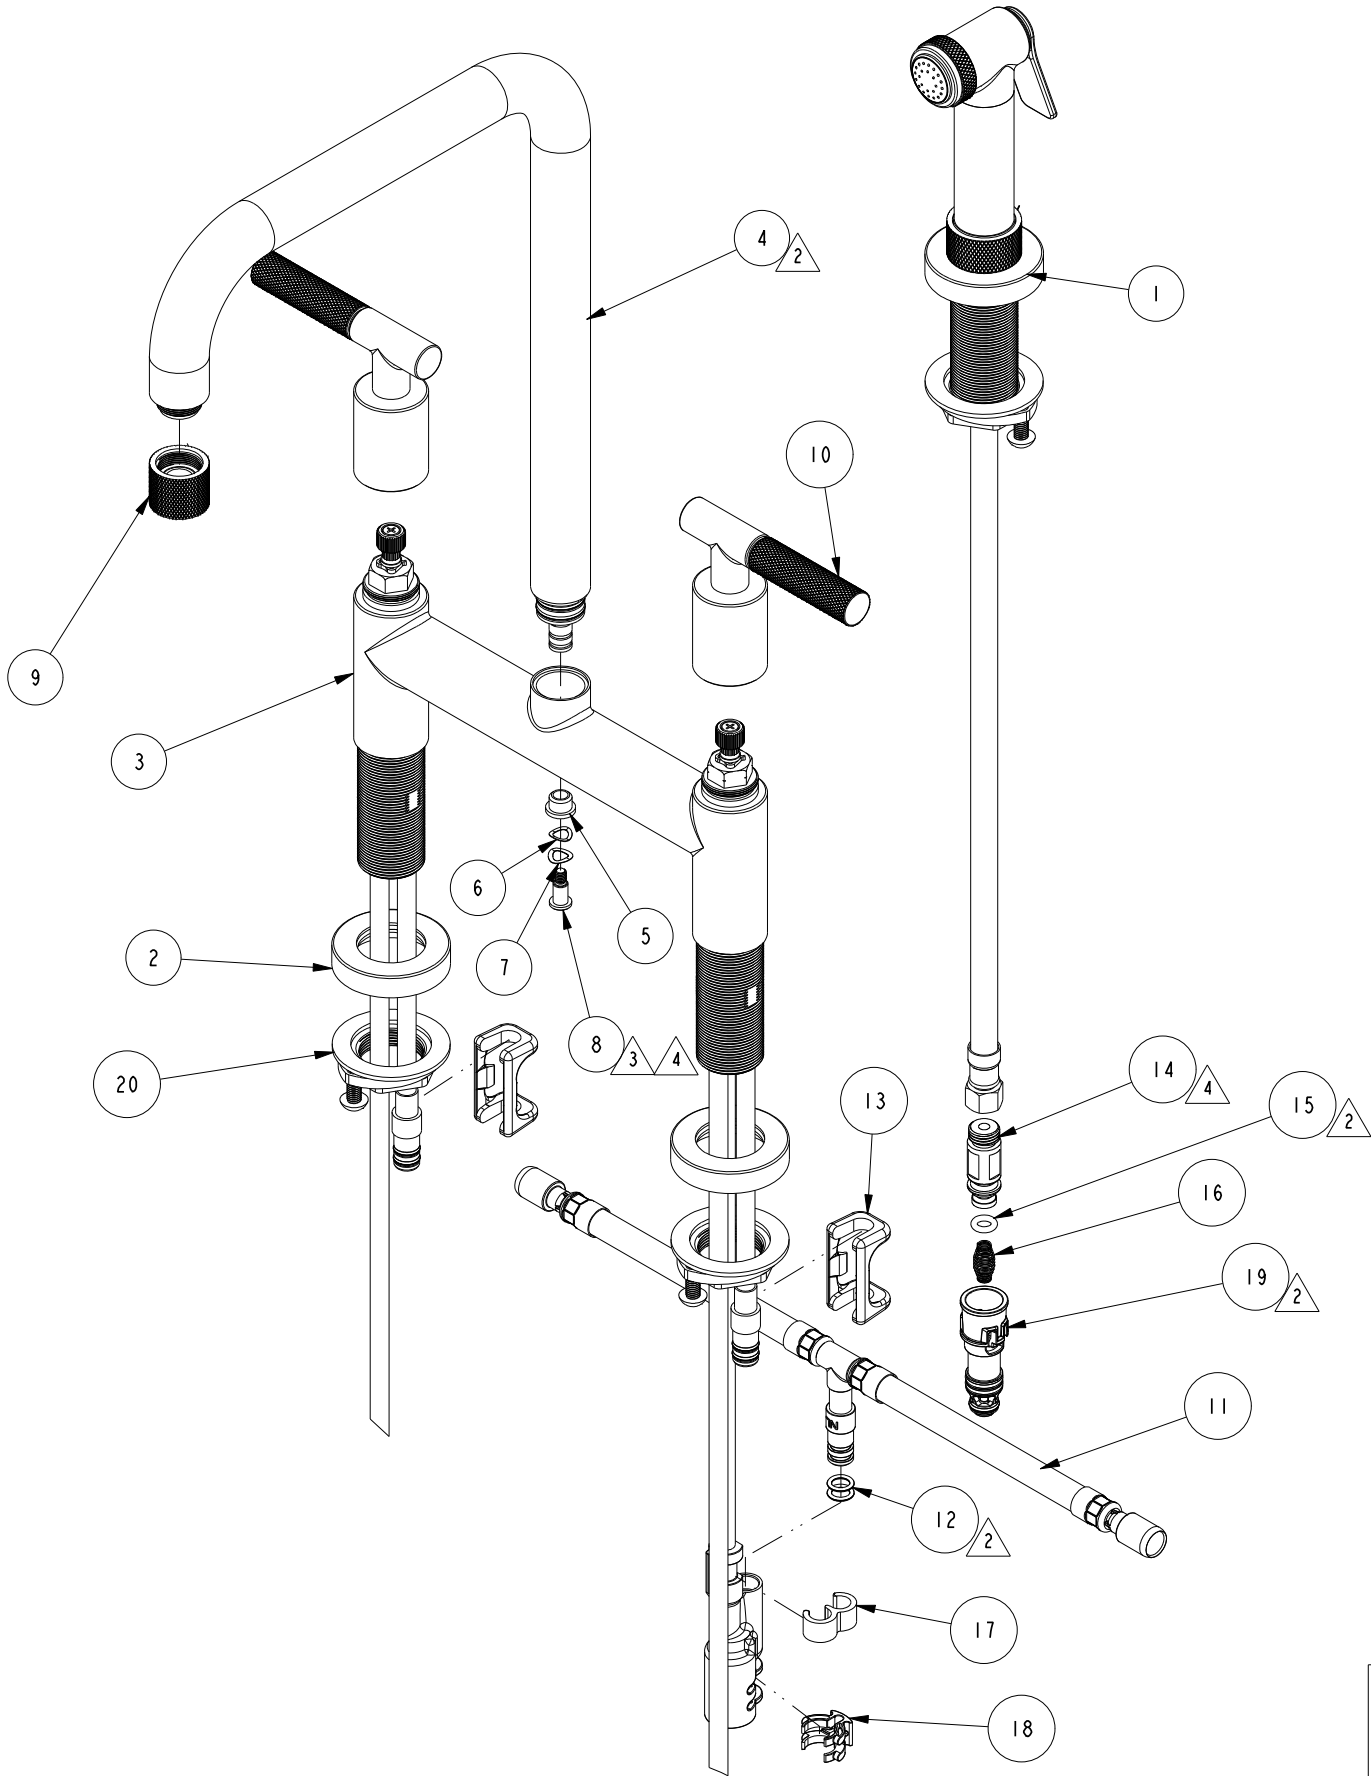

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	3290-5703	KITCHEN SPRAY HEAD	ASSEMBLY	1
2	20-368	ESCUTCHEON ASM	ASSEMBLY	2
3	3-780	BODY ASM.	ASSEMBLY	1
4	3-782	SPOUT ASM.	ASSEMBLY	1
5	91783	FLANGED SLEEVE BEARING	PART	1
6	92293	WSHR, .24 ID X .39 OD X .01 THK, WAVE, SPRING STEEL	PART	1
7	92883	WSHR, .27 ID X .42 OD X .008 THK, WAVE, SPRING STEEL	PART	1
8	92884	SCRW, 10-32 X 3/8 SKT CAP LOW HD SS	PART	1
9	20-639	AERATOR ASM	ASSEMBLY	1
10	20-719	LEVER HANDLE ASM	ASSEMBLY	2
11	1-497	TEE HOSE	ASSEMBLY	1
12	91255	O-RING, #2- 011, EPDM, 65-75 DURO, NSF-61	PART	2
13	91568	RETAINER CLIP	PART	2
14	92964	SIDE SPRAY ADAPTER	PART	1
15	91786	O-RING, #2- 108, EPDM, 65-75 DURO, NSF 61	PART	1
16	91809	DIVERTER SPRING	PART	1
17	91811	TEE HOSE CLIP	PART	1
18	91812	DIVERTER CLIP	PART	1
19	1-496	DIVERTER ASM.	ASSEMBLY	1
20	1-393	1-1/8 18 UNEF MOUNTING KIT	ASSEMBLY	2

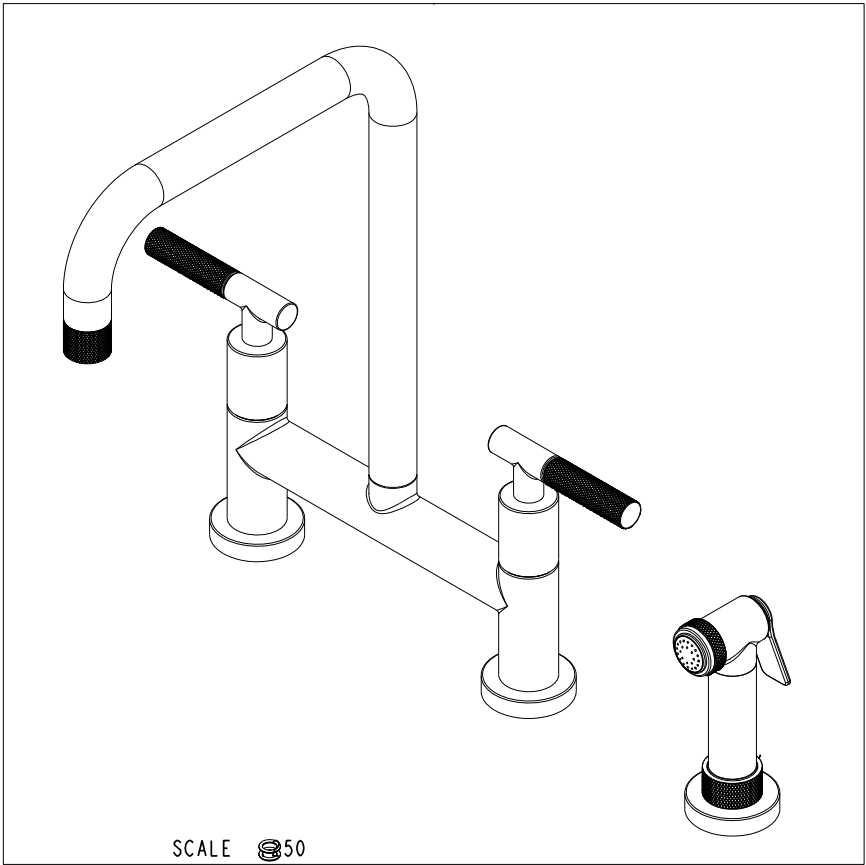

SCALE 50

A	EN-4468-6	04/16/23	J.M.
-	EN-4433	12/07/21	J.M.
REV	DESCRIPTION	DATE	APPROVED

COPYRIGHT 2005 BRASSTECH, INC.
THESE DRAWINGS AND THE DESIGNS
DEPICTED HEREIN ARE THE PROPRIETARY
PROPERTY OF BRASSTECH. ANY USE
OR REPRODUCTION IS SUBJECT TO
THE EXPRESS APPROVAL OF BRASSTECH.
UNAUTHORIZED USE IS STRICTLY
PROHIBITED. ALL RIGHTS RESERVED.

-	-	UNITS ARE: INCHES [MM]		BRASSTECH INCORPORATED KITCHEN BRIDGE FAUCET W/ SPRAY		2001 CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
-	-	TOLERANCES ARE:					
-	-	FRACTIONS DECIMALS	ANGLES				
-	-	±1/16"	±1°				
-	-	.X ±.1 [2.5]					
-	-	.XX ±.06 [1.5]					
-	-	(X.XXX) DENOTES CRITICAL DIMS.					
-	-	ALL THREADS ARE CRITICAL					
NEXT ASSY	USED ON	DRAWN	G.B.	04/19/23	DWG NO.		REV
APPLICATION		CHECKED	J.M.	04/19/23	3360-5413		A
REMOVE ALL BURRS AND SHARP EDGES		APPROVED	J.M.	04/19/23	SCALE .312	REF. -	SHEET 1 OF 2

