



NOTES:

1. TO INSPECT ASSEMBLY, FOLLOW FIRST ARTICLE AND IN PROCESS INSPECTION SHEET.

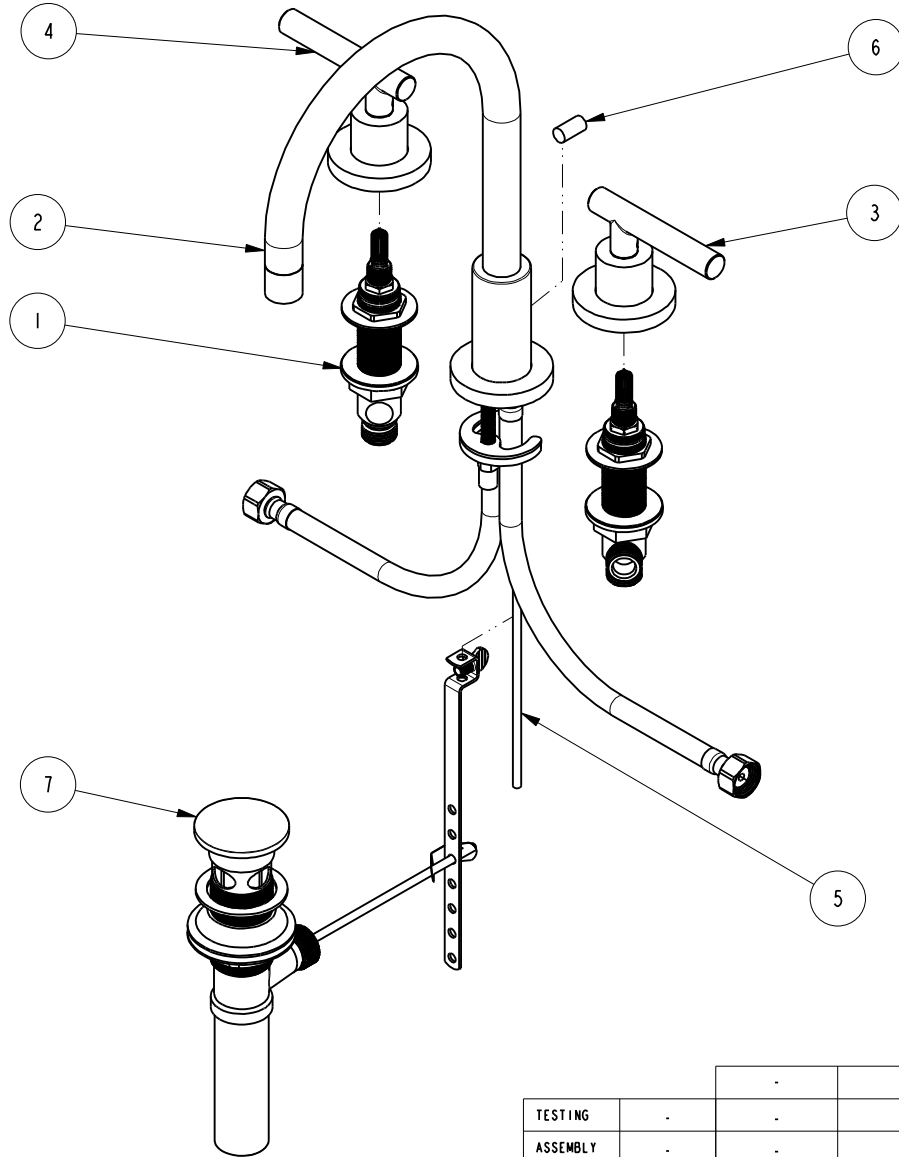

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	1-525	W/S VALVE ASM	ASSEMBLY	1
2	3-233	W/S SPOUT ASM	ASSEMBLY	1
3	3-227LC	HANDLE TRIM ASM - COLD	ASSEMBLY	1
4	3-227LH	HANDLE TRIM ASM - HOT	ASSEMBLY	1
5	10288	3/16" POP UP ROD	PART	1
6	10827	POP-UP KNOB	PART	1
7	325	POP UP ASSEMBLY	ASSEMBLY	1

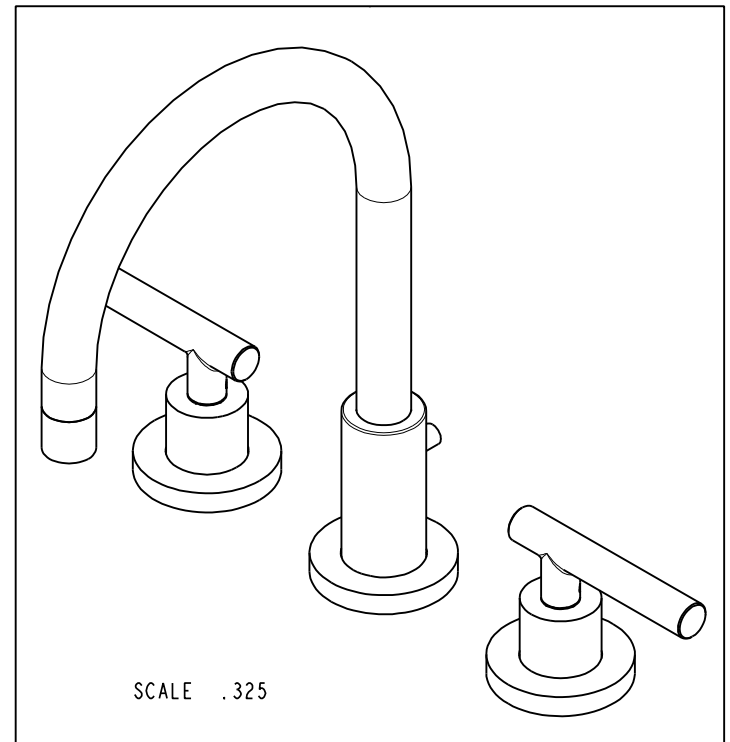

ZONE	REV	DESCRIPTION	DATE	APPROVED
-	B	EN-4300m	11/11/20	R.S.
-	-	RELEASED	-	-

COPYRIGHT 2005 BRASSTECH, INC. THESE DRAWINGS AND THE DESIGNS DEPICTED HEREIN ARE THE PROPRIETARY PROPERTY OF BRASSTECH. ANY USE OR REPRODUCTION IS SUBJECT TO THE EXPRESS APPROVAL OF BRASSTECH. UNAUTHORIZED USE IS STRICTLY PROHIBITED. ALL RIGHTS RESERVED.

TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #	REMOVE ALL BURRS AND SHARP EDGES		

UNITS ARE: INCHES [MM]		
TOLERANCES ARE:		
FRACTIONS	DECIMALS	ANGLES
±1/16"	.X ±.1 [2,5]	±°
	.XX ±.06 [1,5]	
(X.XXX) DENOTES CRITICAL DIMS.		
ALL THREADS ARE CRITICAL		
DRAWN	JINSON	11/11/20
CHECKED	R.S.	11/11/20
APPROVED	R.S.	11/11/20

BRASSTECH		2001 CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
INCORPORATED			
W/S DECK FAUCET			
DWG NO.	990L		REV B
SCALE	.225	REF.	-
SHEET	1	OF	2

4.00 [101.6] MIN
10.00 [254.0] MAX

4.00 [101.6] MIN
10.00 [254.0] MAX

2.13 [54]
AMOUNT OF STEM
REQ. FROM DECK

1.58
[40]
MAX DECK
THICKNESS

1.53
[38,8]
MAX DECK
THICKNESS

ϕ .31
[7,9]

ϕ 2.38
[60,3]

2.99
[75,9]

2.83
[71,8]
 ϕ 2.38
[60,3]

ϕ 1.00
[25,4]

2X 1/2 NPSM
OUTLETS

2X 1/2 NPSM
INLETS

6.00
[152,3]

7.13 [181]

8.75 [222,3]

11.55
[293,5]

BRASSTECH

2001 CARNEGIE AVE.
SANTA ANA, CA 92705
(949) 417-5207

INCORPORATED

DWG NO.

990L

REV

B

SCALE .275

REF. -

SHEET 2 OF 2