

*Complement
your purchase
with these
fine accessories
also from
NEWPORT BRASS®:*

*Lights
 Mirrors
 Bud Vases
 Towel Bars
 Towel Rings
 Toilet Tissue Holders
 Hooks
 Soap Dishes
 Tumbler Holders
 Toiletry Shelves
 Shower Curtain Rods
 Soap & Bottle Baskets
 Hotel Shelves
 Grab Bars
 Cabinet Hardware*

ASTOR

INSTALLATION INSTRUCTIONS

for

505L
BASKET LARGE
CORNER

NEWPORT BRASS

2001 CARNEGIE AVE, SANTA ANA CA
92705 (949) 417-5207
WWW.NEWPORTBRASS.COM


NWP-505L
EN-5075
REV -

NEWPORT BRASS

NEWPORT BRASS ASTOR

INSTALLATION INSTRUCTIONS

FOR
NEWPORT BRASS
505L
BASKET

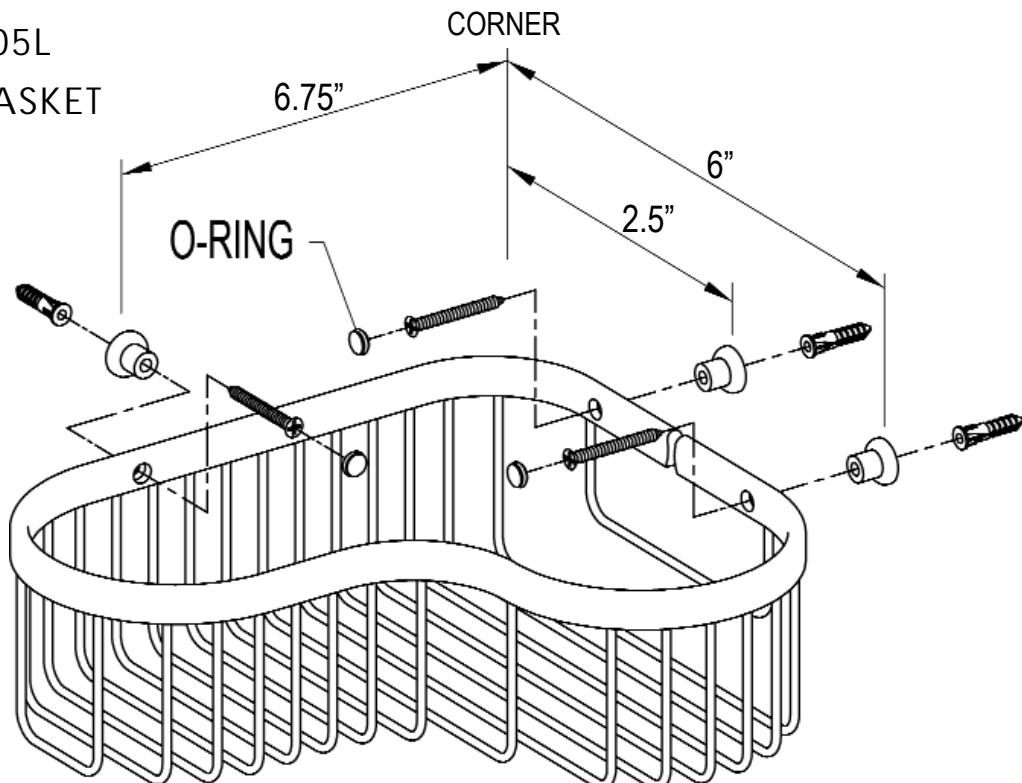

TO PREVENT LOSS OF SMALL PARTS, COVER DRAIN BEFORE BEGINNING.

- 1. Starting from the corner use the measurements shown on the drawing at left and mark the location of the mounting screw holes on the walls.
- 2. To mount on Tile, Drill 1/4" (6mm) holes on the marks. To mount on Drywall, Drill 3/16" (5mm) holes on the marks.
- 3. Push the plastic wall anchors into the holes until the flanges contact the wall.
- 4. Insert the mounting screws through the basket frame and posts and tighten into wall anchors.
- 5. Insert screw covers. Wetting the black rubber on the cover will make insertion easier.

CARE OF FINE BRASS

The finish is protected with a clear, durable, baked-on enamel. To clean, use warm soapy water, and dry with a soft cloth. Occasional paste waxing is also recommended. NEVER use brass polish, abrasives or abrasive wax.