


INSTALLATION INSTRUCTIONS  
BAR FAUCET  
MODEL No: 7008, 7008X

NEWPORT  
365

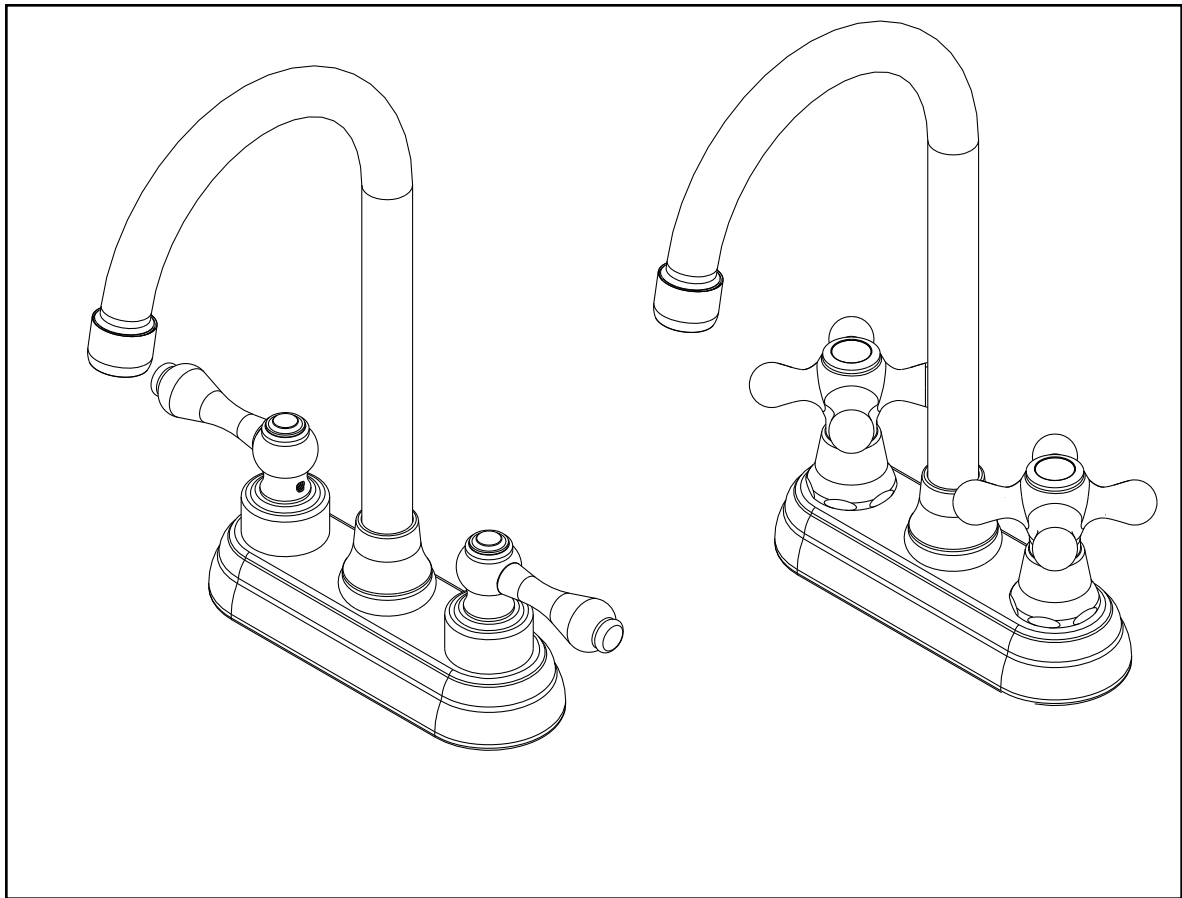

Congratulations on the purchase  
of this Newport product,  
an excellent choice, that will give you  
years of quality service and enhance  
the look and style of your home.

## Recommended Installation by a Professional Plumbing Contractor

Note: The use of petroleum base plumbers putty on our products will nullify the warranty. We recommend the use of clear silicone sealing materials. Recommended deck thru hole  $\varnothing$  1.25".

1. Place the spout assembly through holes of mounting surface. Secure into place with flange nut. (See Fig. 1)
2. Connect water supply hoses (not included) to supply nipple, utilizing washer, nosecone washer, and slip joint nut (also not included). See Fig. 2
3. Remove aerator from spout, turn on water supply, and flush both valves until water is clear. Check for leaks and make any final adjustments required. Re-attach aerator to the spout.

