

NEWPORT BATH

Features

- Solid brass construction
- 5 function with off
- Universal 1/2" NPT and direct sweat connections for installation flexibility
- 16-tooth stem
- Recommended for use with 3/4' thermostatic valve (1-540).
- Requires Newport Brass Handle Trim (many options available, sold-separately)

DIVERTER VALVE

1-702



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAMPO/cUPC
- IPC
- California Energy Commission
- ASSE 1016
- All applicable US Federal and State material regulations

Colors / Finishes

- 10B: Oil Rubbed Bronze
 - 15: Polished Nickel
 - 15S: Satin Nickel - PVD
 - 26: Polished Chrome
- Other: Refer to the Newport Brass catalog for additional color/finish options.



Specified Model

| Model | Description | Colors Finishes |
|-------|---------------------------|-----------------------------|
| 1-702 | Flow Control Valve 3-Port | <input type="checkbox"/> NA |


Product Specification:

Add "Color / Finish" suffix to Model number, below.

The Flow Control Valve for wall installations shall be made of solid brass construction. 16 tooth valve body shall have 5 diverting capabilities with off function. Outlet 1, (outlets 1&2) Outlet 2, (outlets 2&3) Outlet 3. The Flow Control Valve for wall installations shall be Newport Brass Model 1-702.

1-702

PRODUCT DIMENSIONS *(Units are in inches)*

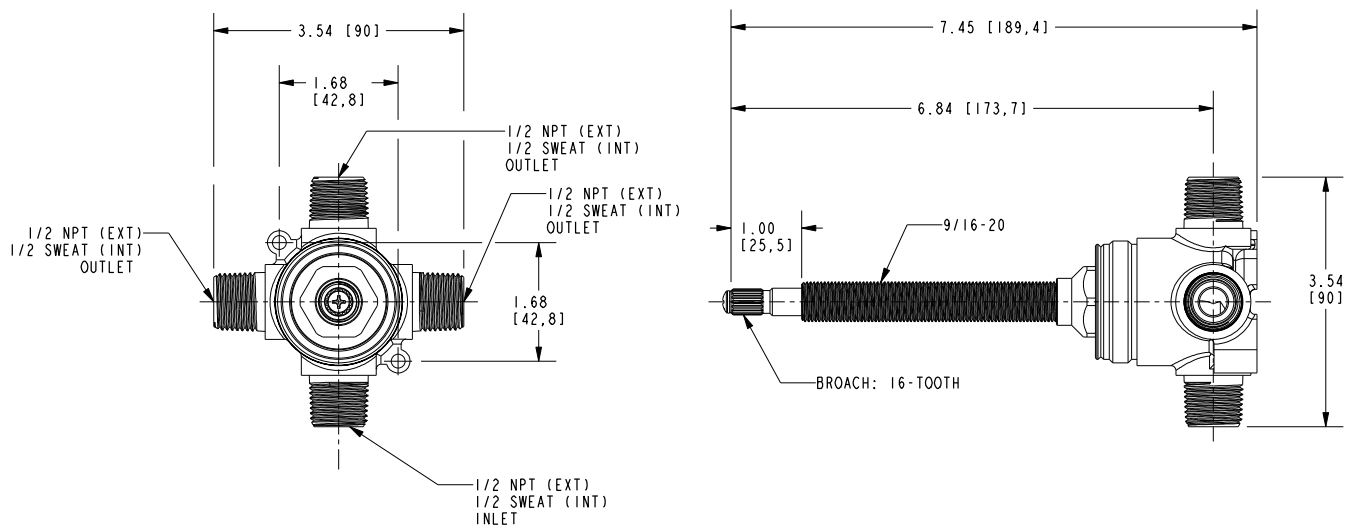

Newport Diverter Valve 1-702