#### Features

- Solid brass construction
- Quarter-turn washerless ceramic disc valve cartridges
- 3/4" NPT hot and cold inlet fittings
- 8.84" (22.4 cm) to 10.12" (25.7 cm) tub spout reach (wall-center)
- 2.08" (5.3 cm) handshower diameter
- For wall mounted configurations, all is included
- "For floor mounted configurations, select optional accessories, below"
- ADA Compliant (Handles Only)
- 1.8 GPM (6.8 LPM) Max, Handshower Only

### **Codes / Standards Compliance**

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAMPO/cUPC
- IPC
- ADA & ICC/ANSI A117.1 (Handle Only)
- Energy Policy Act of 1992
- EPA WaterSense
- California Energy Commission
- ASME A112.18.3 (Back Flow)
- All applicable US Federal and State material regulations

#### **Colors / Finishes**

- 10B: Oil Rubbed Bronze
- 15: Polished Nickel
- 15S: Satin Nickel PVD
- 26: Polished Chrome
- Other: Refer to the Newport Brass catalog for additional color/finish options.

## **Specified Model**

Model	Description	Colors   Finishes		
1600-4282	Exposed Tub and Handshower Set (Wall Mount)	□ 10B □ 15 □ 15S □ 26 □ Other		

#### **Optional Accessory:**

Model	3-196	3-226	3-192	2-734
Descriptions	Floor Mounting Kit (3/4" NPT x 31" risers)	Floor Mounting Kit (3/4" NPT x 24" risers)	Shut-off Valve Set (Pair, Hot & Cold)	Tub Stabilizer Ki
Finishes	10B 15 15S 26 Other	10B 15 15 26 Other	10B 15 15S 26 Other	10B 15 15S 26 Other
Image				Contento o

#### Product Specification Add "Color / Finish" suffix to Model number, below.

The Exposed Tub and Handshower Set shall be made of solid brass construction and incorporate quarter-turn washerless ceramic disc valve cartridges. Exposed Tub and Handshower Set shall incorporate a push button diverter and ADA compliant cross handles. Product shall be designed for wall-mounted configurations and be able to accommodate floor mounted configurations via the addition of optional accessories. Product shall have a 8.84" (22.4 cm) to 10.12" (25.7 cm) tub spout reach (wall-center) and 3/4" NPT wall-mounted hot/cold inlet fittings. Product shall feature a solid brass handshower having a diameter of 2.08" (5.3 cm) and a 1.8 gallons (6.7 liters)per minute maximum flow rate. Exposed Tub and Handshower Set shall be Newport Brass Model 1600-4282/\_\_\_\_. [Optional Floor Mounting Kit (3/4" NPT) shall be 3-\_\_\_\_/\_\_\_. Shut-off Valve Set shall be 3-192/\_\_\_\_\_ and Tub Stabilizer Kit shall be 2-734/\_\_\_\_.]

# Tub and Handshower Set 1600-4282






MIRO

# 1600-4282

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

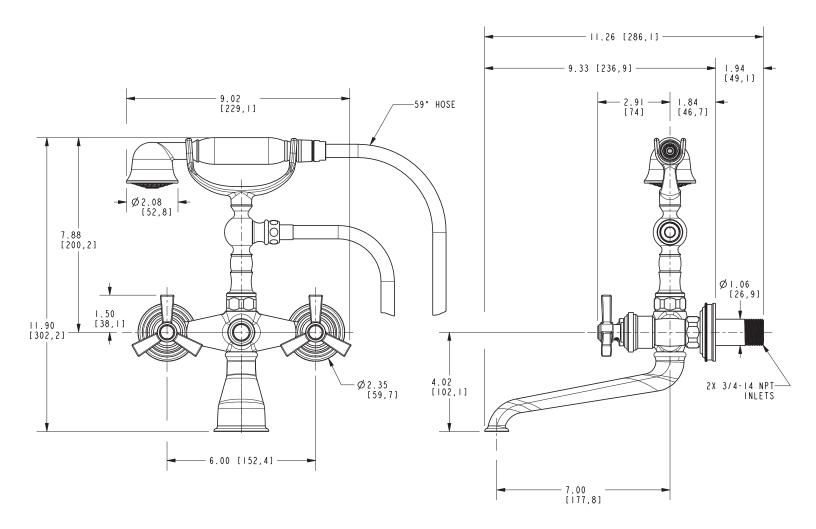

## Miro Tub and Handshower Set 1600-4282

Page 2 of 2 Spec\_1600-4282\_d\_8.22 EN-4536

NEWPORT BRASS

t: 949.417.5207 | www.newportbrass.com ©2022 Brasstech, Inc.