

Features

Brass Construction  
Euro-motion ceramic disc 40 mm valve cartridge  
9.25 gallons (35 liters) per minute spout maximum flow rate  
3/4" braided hot and cold supply lines (with 1/2" adapters)  
37.99" (96.5 cm) tub spout height at outlet  
8.66" (22.0 cm) tub spout reach (center-center)  
Contemporary handshower design of resin construction  
Floor mounting bracket with integral base and escutcheon  
ADA Compliant (Handles Only)  
1.8 GPM (6.8 LPM) Max, Handshower Only

Tub and Handshower Set


2040-4261



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1  
IAPMO/cUPC  
IPC  
ADA & ICC/ANSI A117.1 (Handle Only)  
Energy Policy Act of 1992  
EPA WaterSense  
California Energy Commission  
ASME A112.18.3 (Back Flow)  
All applicable US Federal and State material regulations

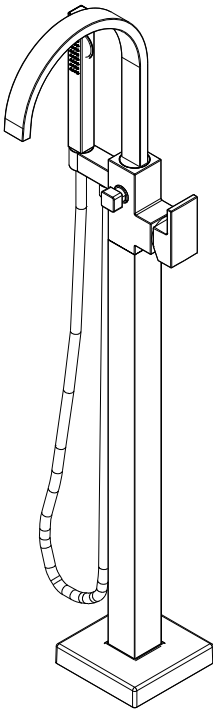



ACCESSORY OPTIONAL

|                |  |
|----------------|--|
| System Element | 1-339  |
| Description    | Freestanding Tub Fill Rough Kit (Floor Mount)  |
| Image          | A line drawing of the Freestanding Tub Fill Rough Kit (Floor Mount). It shows a circular floor plate with a central mounting bracket and four screws for securing it to the floor. |

# 2040-4261

## PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

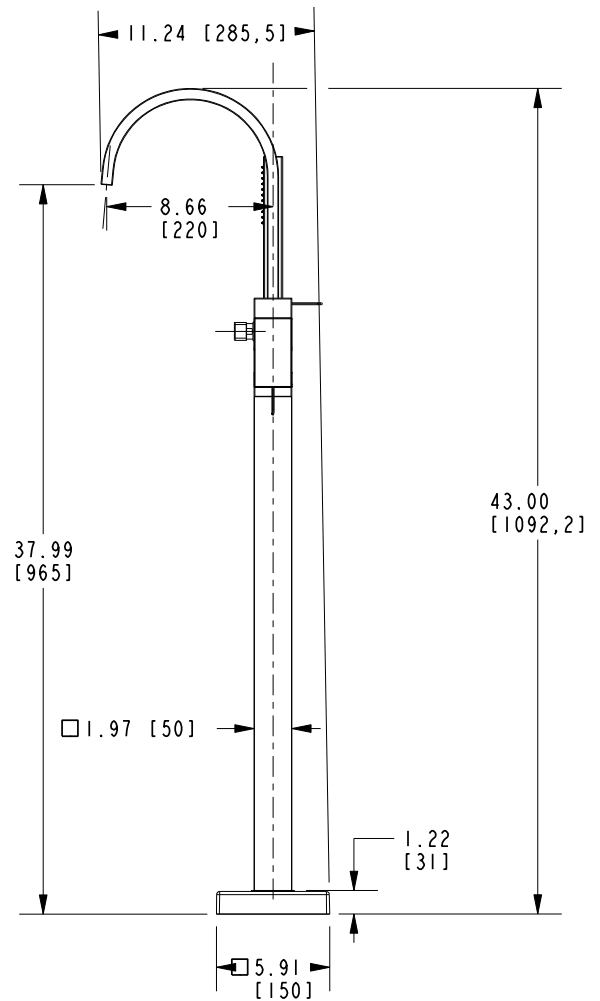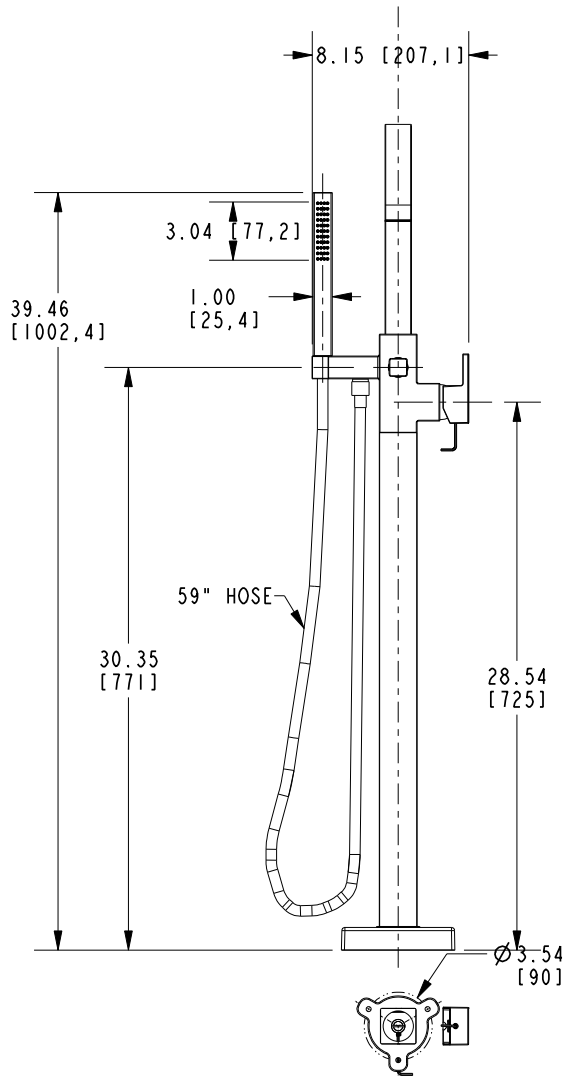

Tub and Handshower Set

2040-4261

Page 2 of 2

EN- 5008

REV R

**NEWPORT BRASS**  
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | [www.newportbrass.com](http://www.newportbrass.com)  
©2025 NewportBrass