

NEWPORT BRASS

AYLESBURY

TUB AND HANDSHOWER SET

2400-4261

Features


- Solid Brass Construction
- Progressive-motion ceramic disc 38 mm valve cartridge
- 14 gallons (53 liters) per minute spout flow rate at 60 psi
- 3/4" inlet braided hot and cold supply lines (with 3/4" to 1/2" adapters)
- 35.73" (90.8 cm) tub spout height at outlet
- 9.20" (23.4 cm) tub spout reach (center-center)
- Traditional handshower design of brass construction
- ADA Compliant (Handles Only)
- 1.8 GPM (6.8 LPM) Max, Handshower Only



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- IPC
- ADA & ICC/ANSI A117.1 (Handle Only)
- Energy Policy Act of 1992
- EPA WaterSense
- California Energy Commission
- ASME A112.18.3 (Back Flow) Double check valves at hand shower inlet
- All applicable US Federal and State material regulations

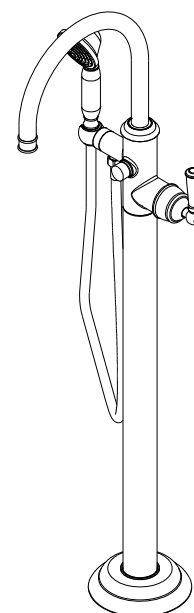


OPTIONAL ACCESSORY

System Element	Rough valve	Tempering valve
Description	Freestanding Tub Fill Rough Kit (Floor Mount)	Thermostatic mixing valve (temperature regulator)
Inlet/Outlet Size	3/4" NPT and 1/2" direct sweat inlets / 3/4" NPSM outlets	1/2" direct sweat connections
Part Number	1-339	1-535
Image	A line drawing of the Freestanding Tub Fill Rough Kit (Floor Mount), showing a circular floor flange with four mounting holes and a central valve body.	A line drawing of the Thermostatic mixing valve (temperature regulator), showing a cylindrical valve body with two main ports and a control knob on top.

NEWPORT BRASS

PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

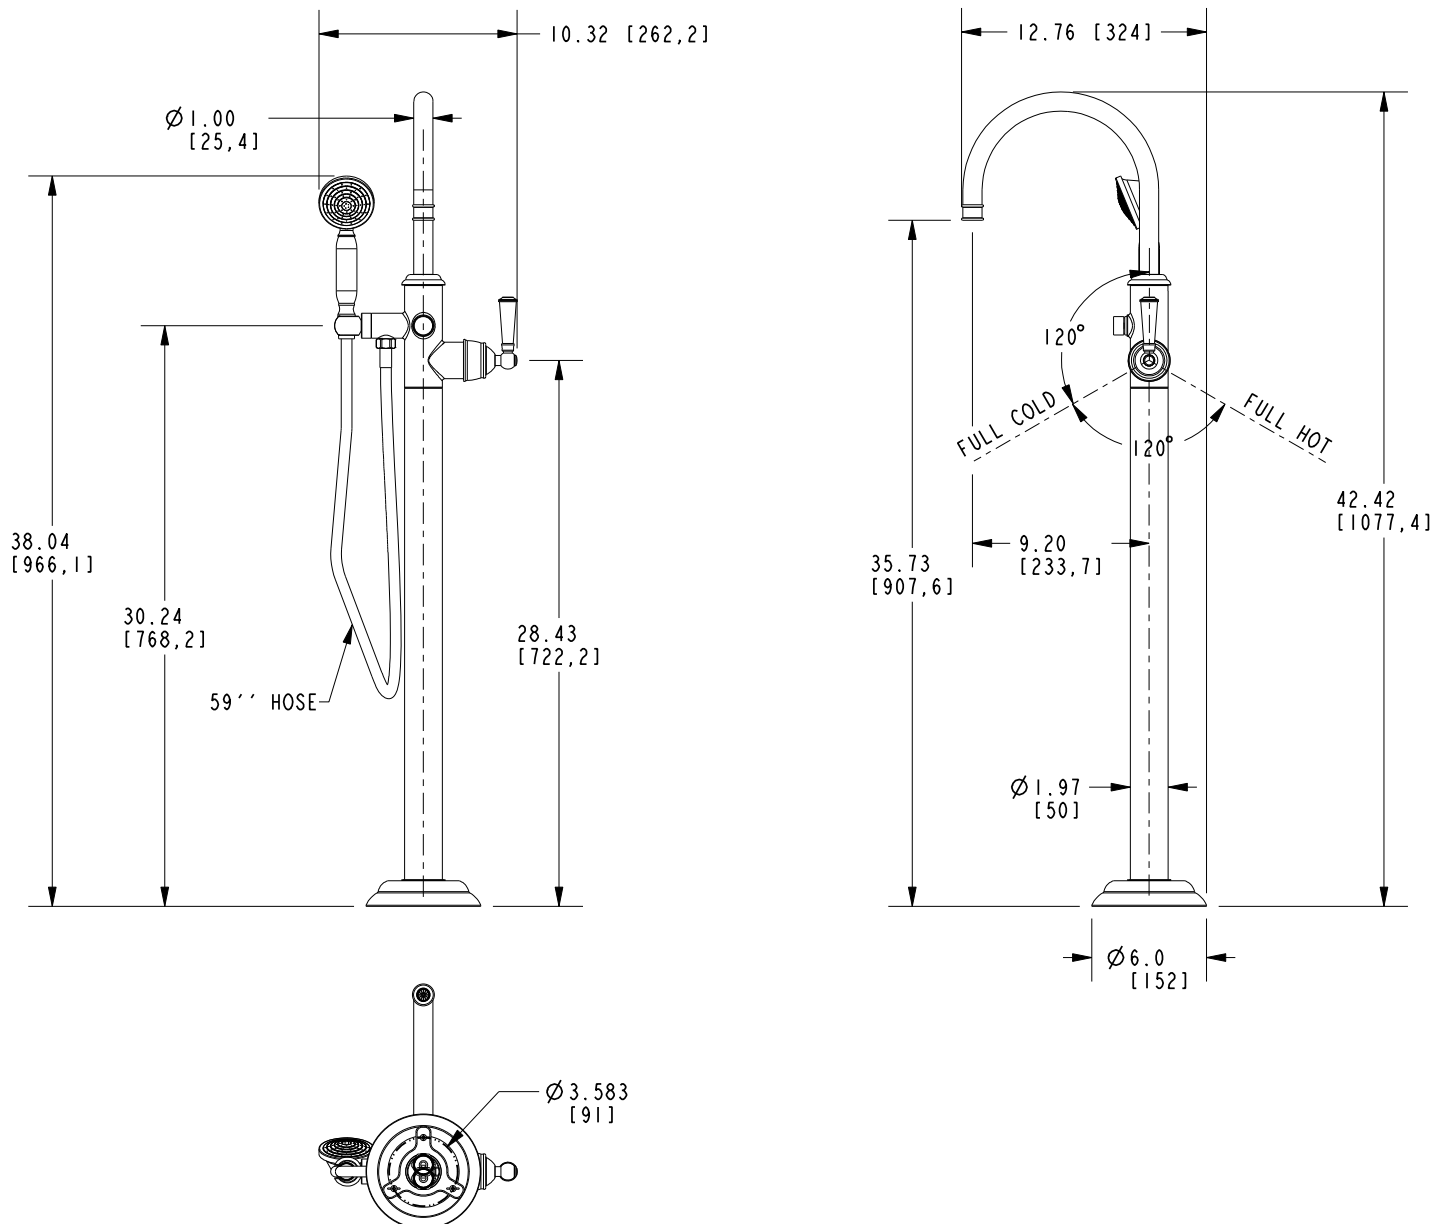

TUB AND HANDSHOWER SET

2400-4261