

TAFT

Features

Solid brass consturction Euro-motion ceramic disc 25 mm valve cartridge Independent rotational and pivoting lever handle elements Two-function, Lever control spray engine with solid brass housing Magnetic docking system secures spray engine to spout Pivoting-ball spray engine inlet fitting for enhanced directional control 10.59" (26.8 cm) spout height at outlet 8.78" (22.3 cm) spout reach (c-c) ADA Compliant (Handles Only) 1.8 GPM (6.8 LPM) Max Pull-Down Kitchen Faucet


2940-5173



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.1/CSA B125.1 IAMPO/CUPC NSF/ANSI/CAN 61, SECTION 9 NSF/ANSI 372 IPC ADA & ICC/ANSI A117.1 (Handle Only) Energy Policy Act of 1992 California Energy Commission ASME A112.18.3 (Back Flow) All applicable US Federal and State material regulations

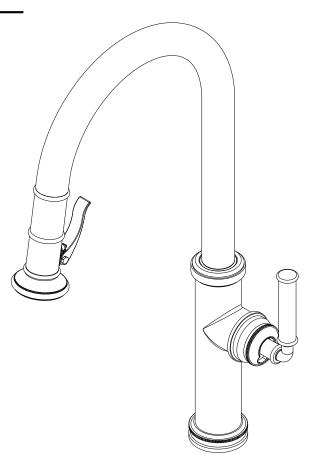

2940-5173

PRODUCT DIMENSIONS (Units are in inches)

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

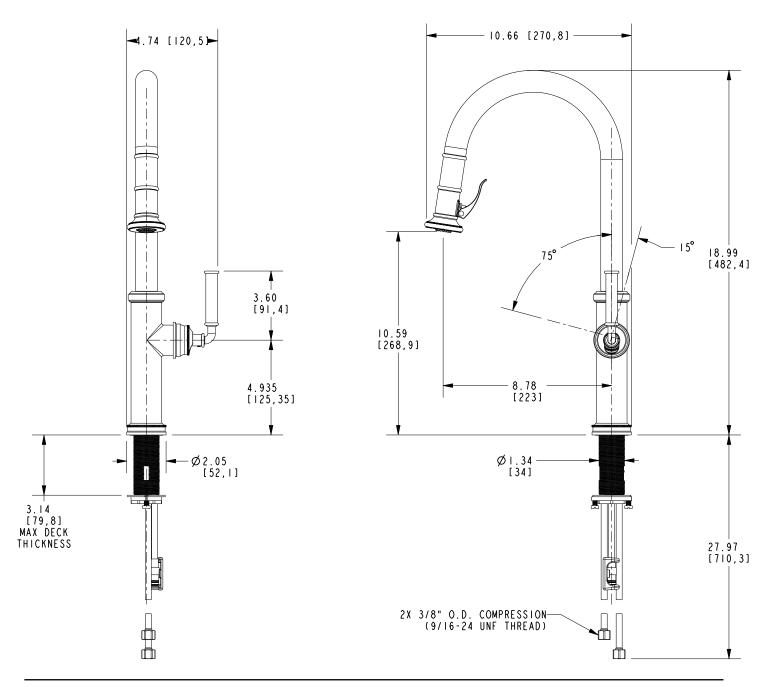

Pull-Down Kitchen Faucet 2940-5173

NEWPORT BRASS. Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | www.newportbrass.com ©2024 Brasstech, Inc.

Page 2 of 2 EN- 4936 REV A