

Features

Solid brass construction  
Euro-motion ceramic disc 40 mm valve cartridge  
9.25 gallons (35 liters) per minute spout maximum flow rate  
3/4" braided hot and cold supply lines (with 1/2" adapters)  
37.26" (94.7 cm) tub spout height at outlet  
8.73" (22.2 cm) tub spout reach (center-center)  
Contemporary handshower design of brass construction  
Floor mounting bracket with integral base and escutcheon  
ADA Compliant (Handles Only)  
1.8 GPM (6.8 LPM) Max, Handshower Only


Codes / Standards Compliance


Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1  
IAMPO/cUPC  
IPC  
ADA & ICC/ANSI A117.1 (Handle Only)  
Energy Policy Act of 1991  
EPA WaterSense  
California Energy Commission  
ASME A112.18.3 (Back Flow)  
All applicable US Federal and State material regulations

FREESTANDING TUB FILLER

3290-4261


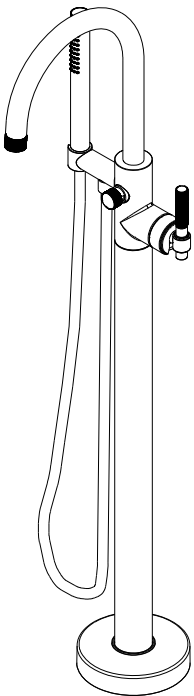


ACCESSORY OPTIONAL	
System Element	Water Supply Rough
Description	Freestanding Tub Fill Rough Kit (Floor Mount)
Inlet/Outlet Size	3/4" NPT / 3/4" NPT
Part Number	1-339
Image	

# 3290-4261

## PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

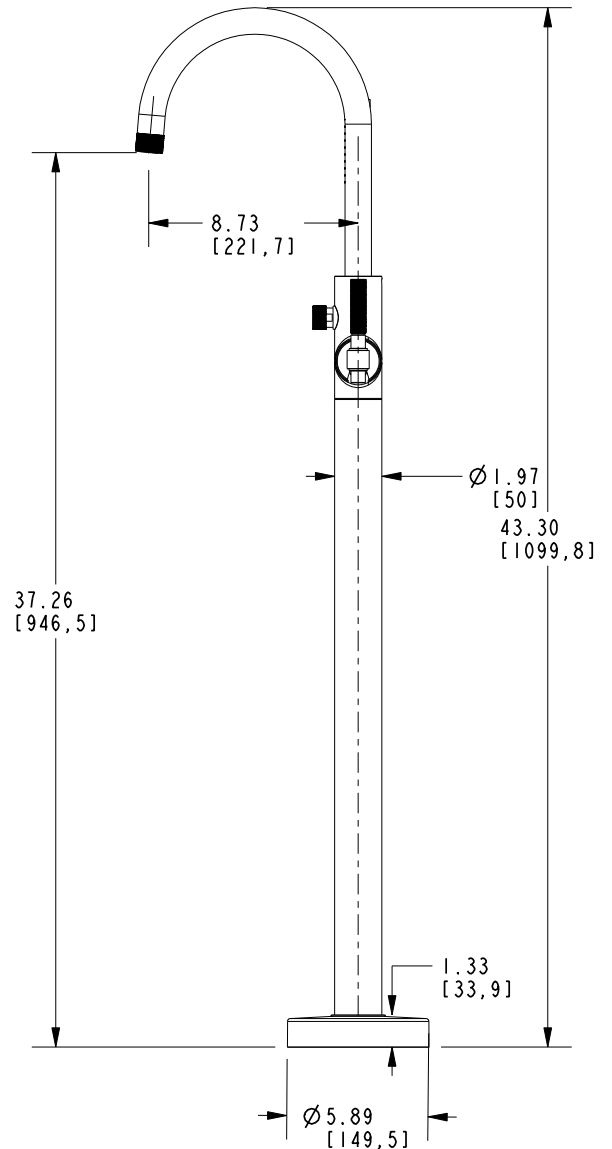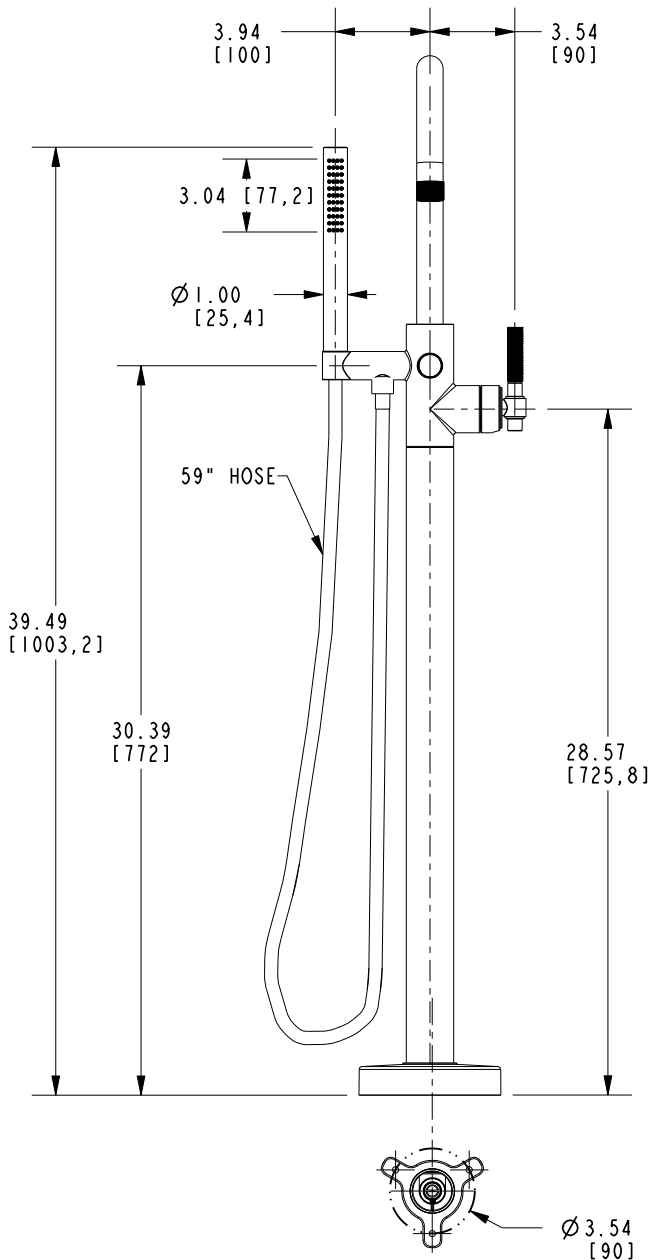

FREESTANDING TUB FILLER

3290-4261

Page 2 of 2

EN- 4946

REV C

**NEWPORT BRASS**  
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | [www.newportbrass.com](http://www.newportbrass.com)  
©2024 Brasstech, Inc.